

Product Specifications

■ WMN-55VD

Width (mm) X Height (mm)	1213.0 X 539.8mm (Landscape type) (Exclusion: BRKT HEIGHT BAR, SPACER A/B) VESA(mm): 600x400, 400x400, 400x600
Width (mm) X Height (mm)	684.0 X 539.8mm (Portrait type) (Exclusion: BRKT HEIGHT BAR, SPACER A/B) VESA(mm): 600x400, 400x400, 400x600
Depth (mm)	39.0mm (Minimum) / Tolerance adjustment (+8.0mm)
Extendible Range (mm)	190mm Type : Landscape(default), Portrait type.
Product weight with the packaging (Kg)	11.3Kg
Maximum SET load (Kg)	30Kg

■ WMN-46VD

Width (mm) X Height (mm)	1022.0 X 539.8mm (Landscape type) (Exclusion: BRKT HEIGHT BAR, SPACER A/B) VESA(mm): 600x400, 400x400, 400x600
Width (mm) X Height (mm)	576.6 X 539.8mm (Portrait type) (Exclusion: BRKT HEIGHT BAR, SPACER A/B) VESA(mm): 600x400, 400x400, 400x600
Depth (mm)	39.0mm (Minimum) / Tolerance adjustment (+8.0mm)
Extendible Range (mm)	190mm Type : Landscape(default), Portrait type.
Product weight with the packaging (Kg)	10.4Kg
Maximum SET load (Kg)	30Kg

Precautions for interior assembly

When you both install a video wall and proceed with interior trim or decorative moldings on it, you can adjust the tolerance properly in the directions of **+Y (10mm) and +Z (8mm)** based on the provided specifications.

Ensure proper space (+α mm) required to adjust tolerance at the top of the video wall.


Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm) behind the video wall.

Warranty period : 1 Year

This SAMSUNG brand product, as supplied and distributed by SAMSUNG and delivered new, in the original carton to the original consumer purchaser, is warranted by SAMSUNG against manufacturing defects in materials and workmanship for the limited warranty period listed for your country in the warranty table at the end of this manual. This limited warranty begins on the original date of purchase. To receive warranty service, the purchaser must contact SAMSUNG for problem determination and service procedures. Warranty service can only be performed by a SAMSUNG authorized service centre. The original dated bill of sale must be presented upon request as proof of purchase to SAMSUNG or SAMSUNG's authorized service centre.


WMN-55VD (Landscape type)

Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).

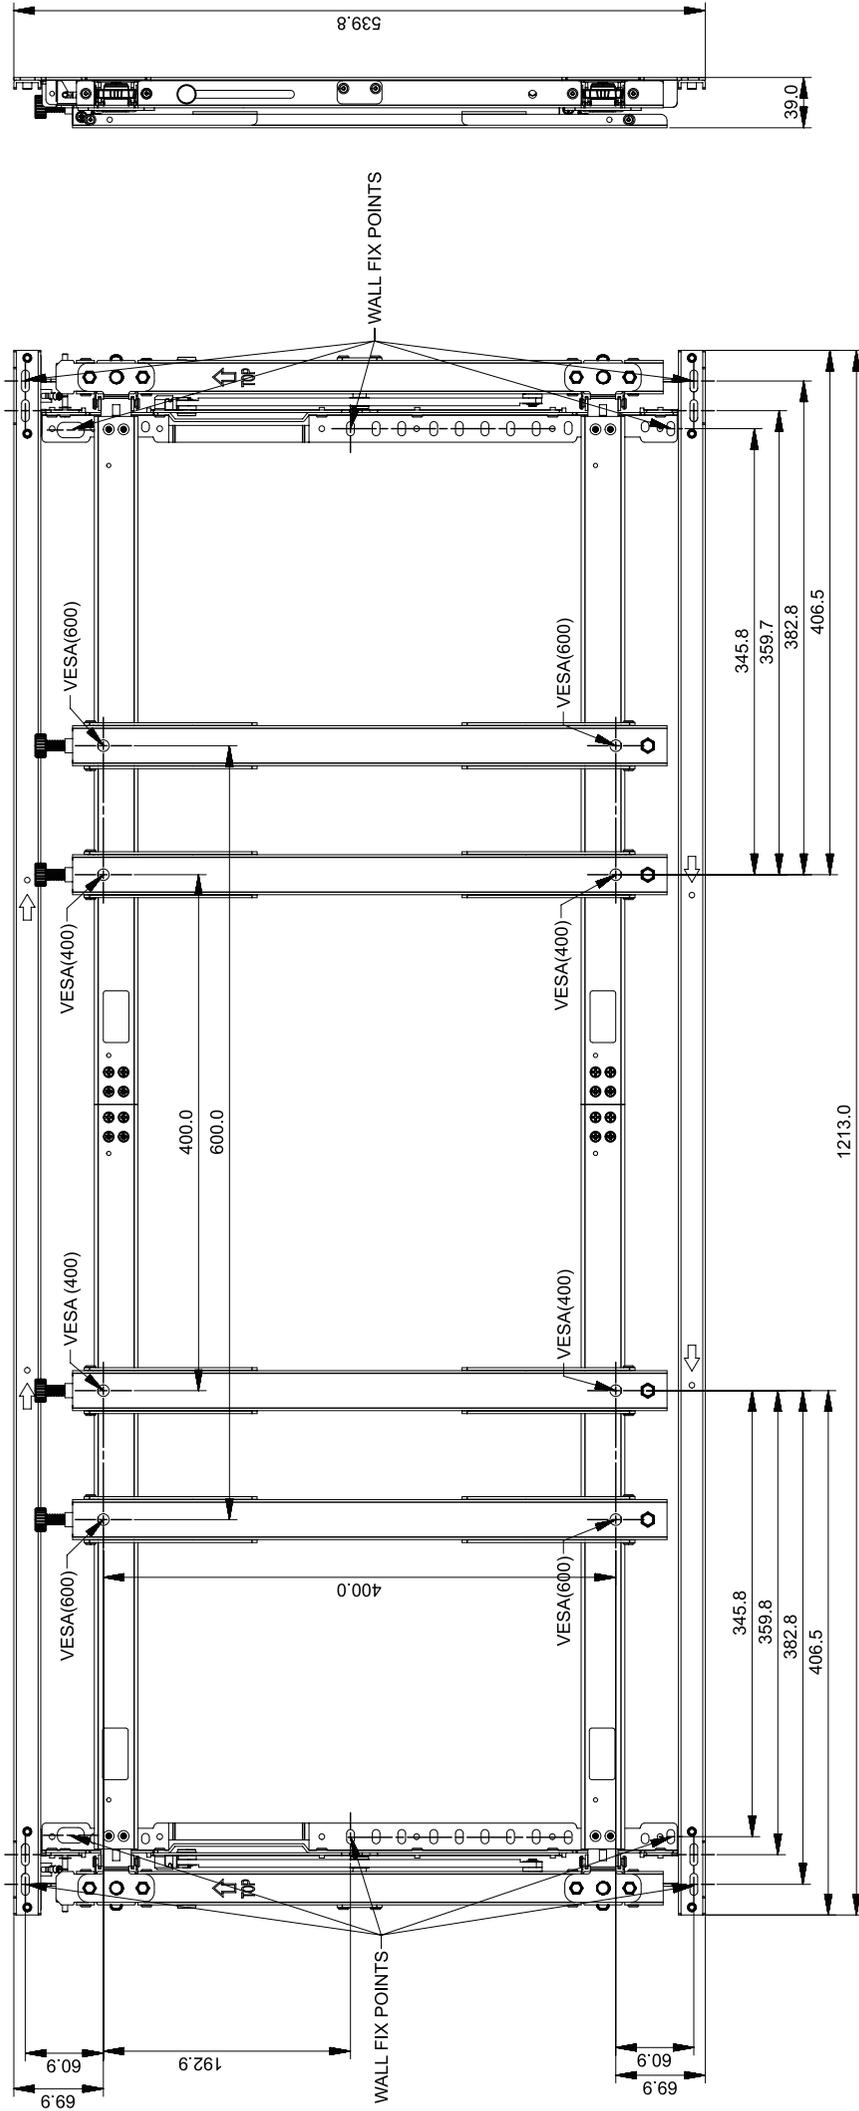


WMN-46VD (Landscape type)

Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).

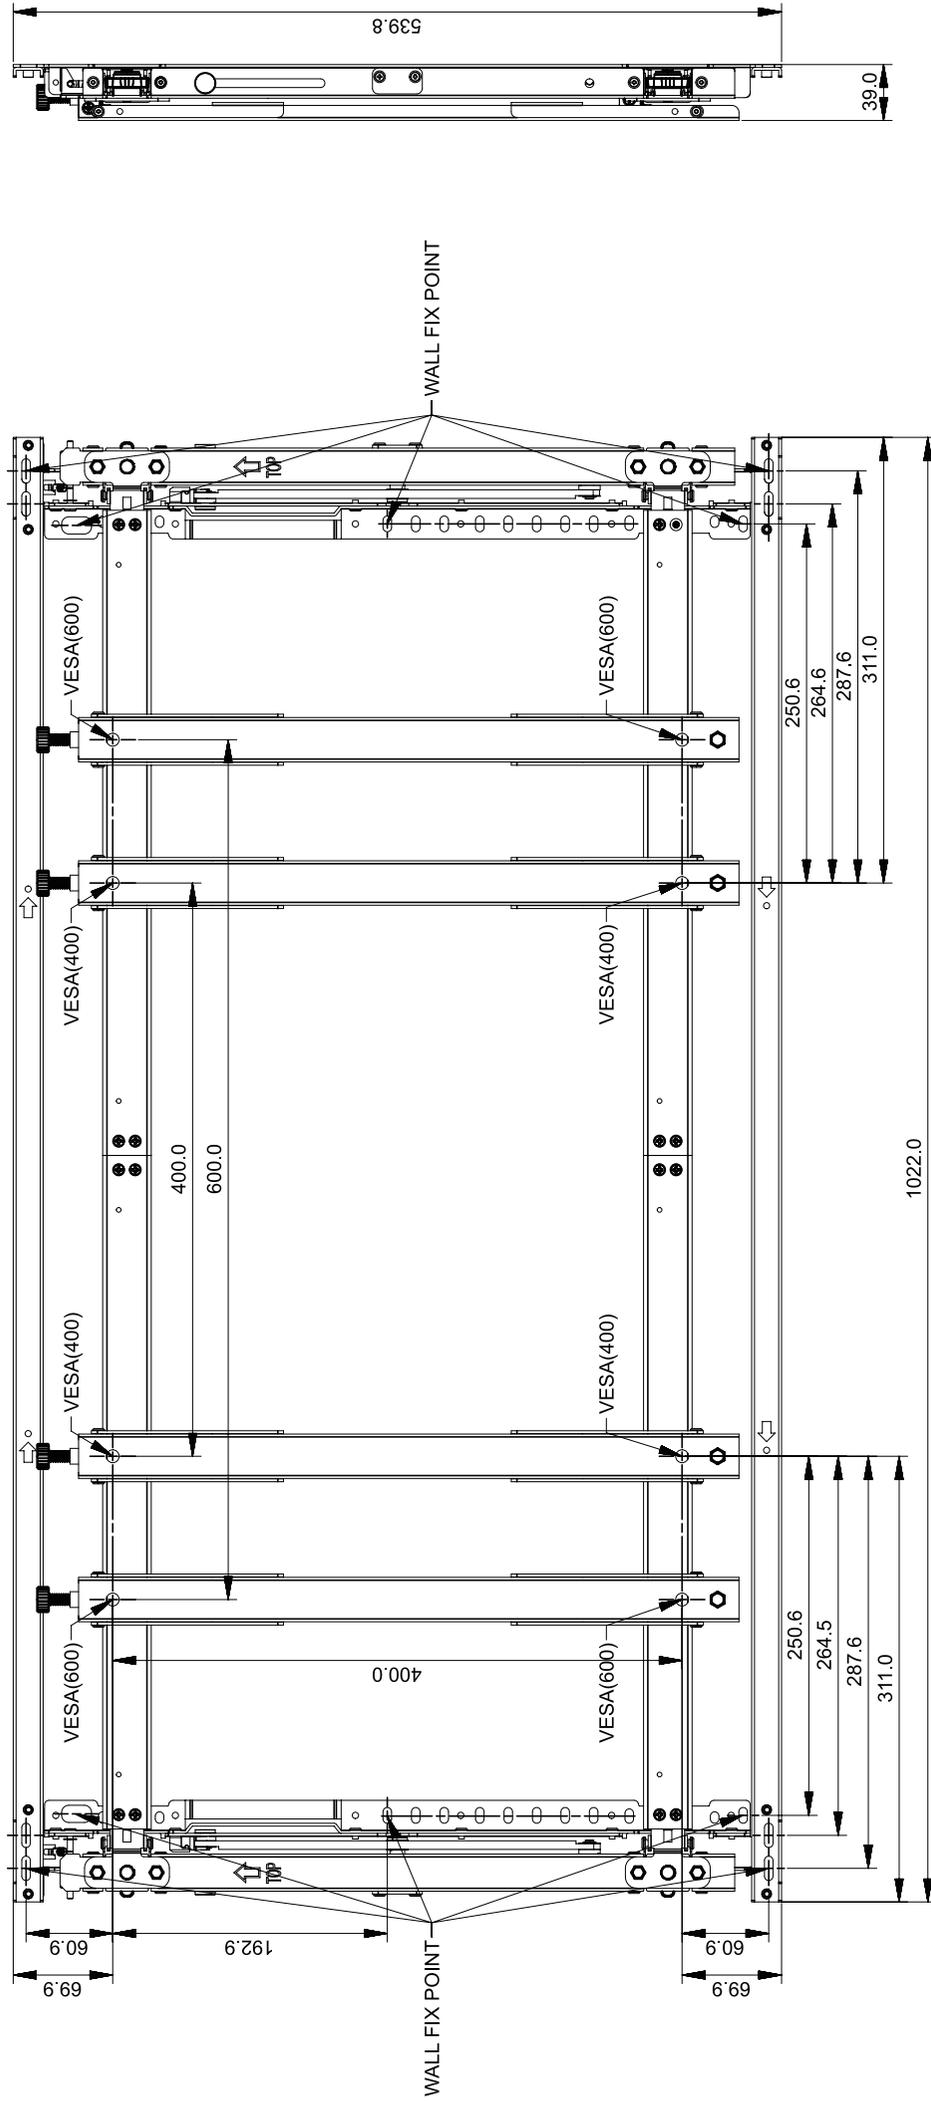

■ WMN-46VD (Portrait type)


▲ Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).

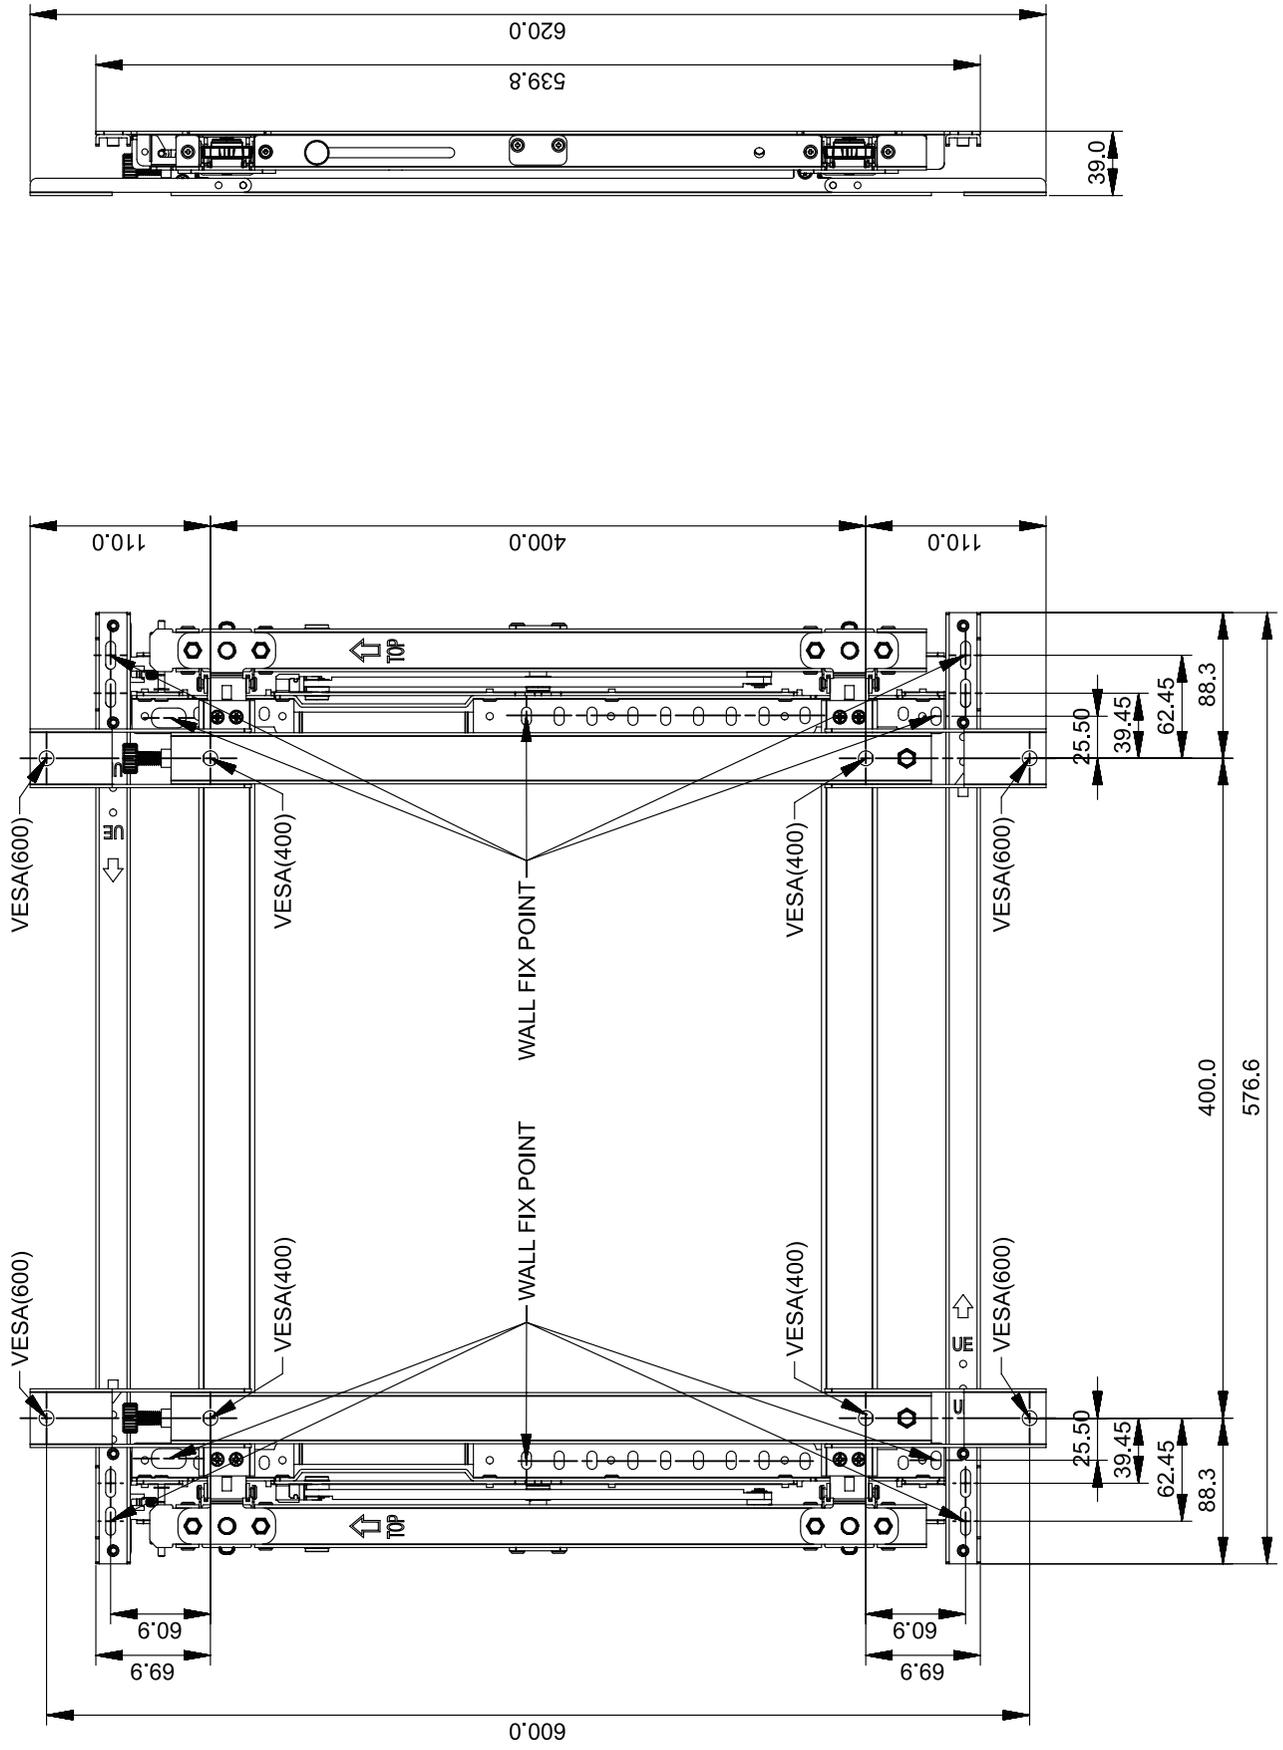

WMN-55VD (Landscape type – UD Series)

Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).


Make sure to remove the component  before mounting the Signage.

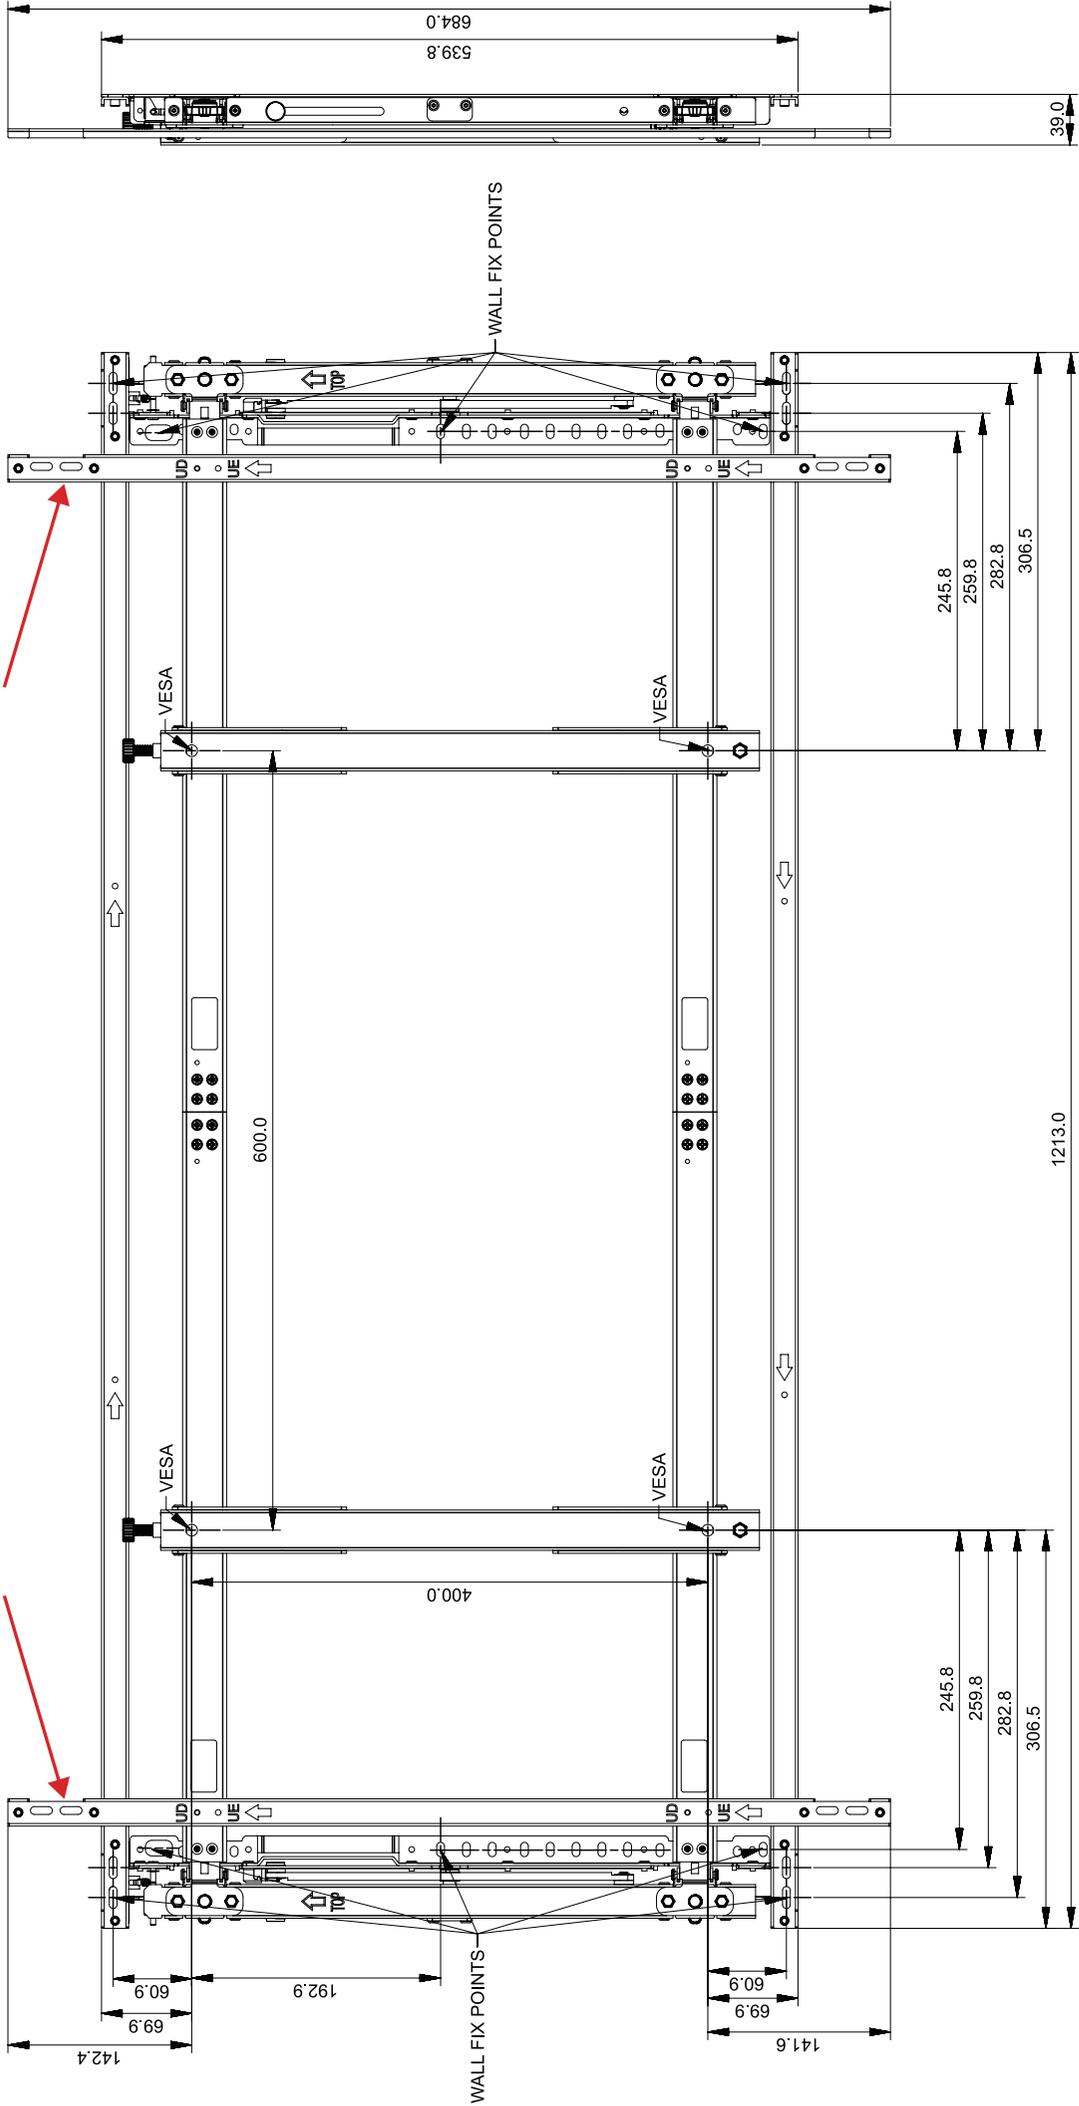

WMN-55VD (Portrait type – UD Series)

- ⚠ Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).
- ⚠ The VESA standards indicate that the wall mount should not be bilaterally symmetric when it is installed in portrait orientation.


Make sure to remove the component **A** before mounting the Signage.

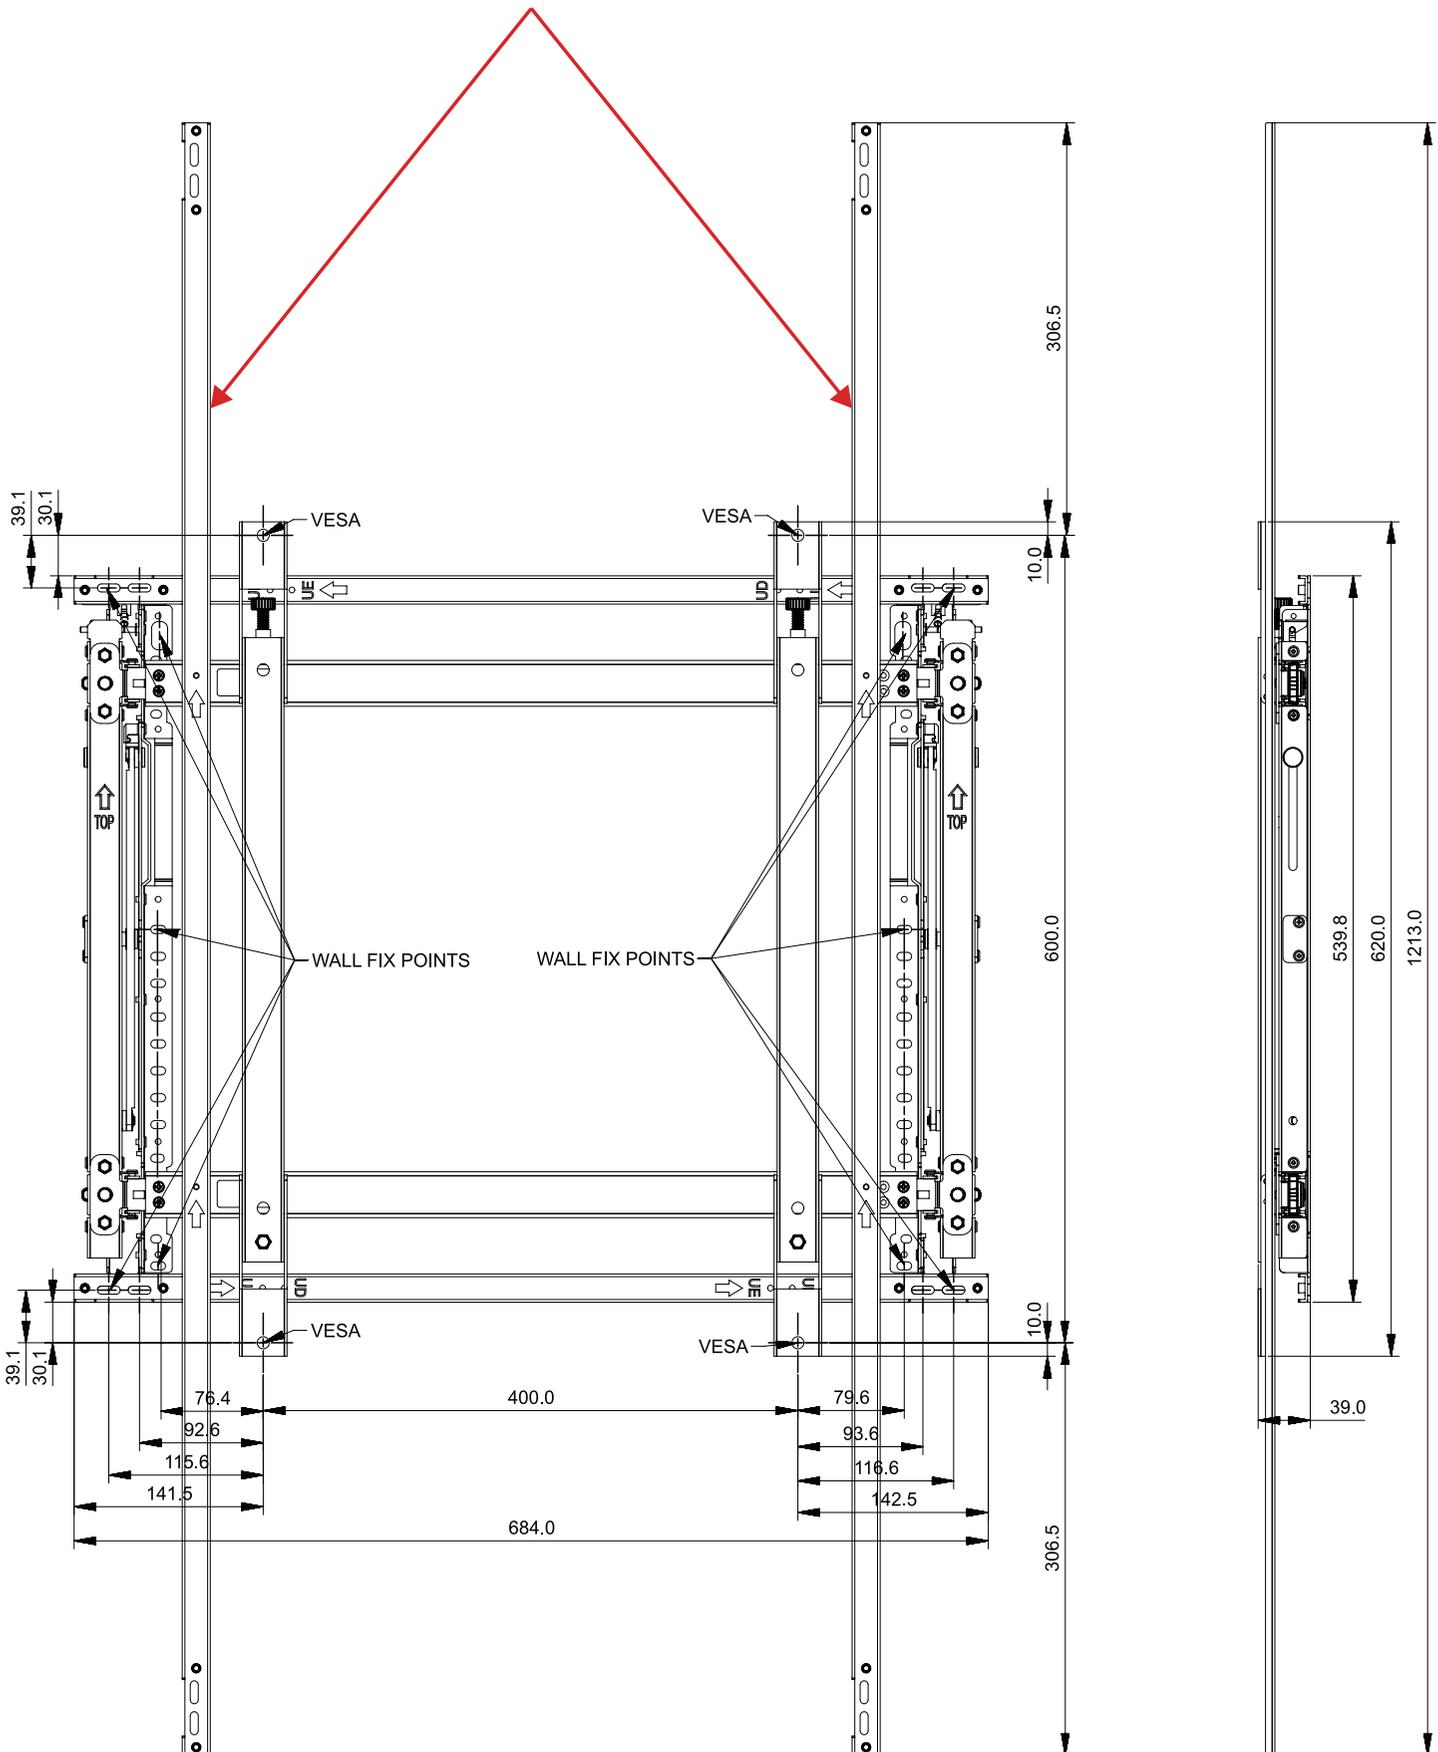

■ WMN-46VD (Landscape type – UD Series)

- ⚠ Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).


Make sure to remove the component **C** before mounting the Signage.

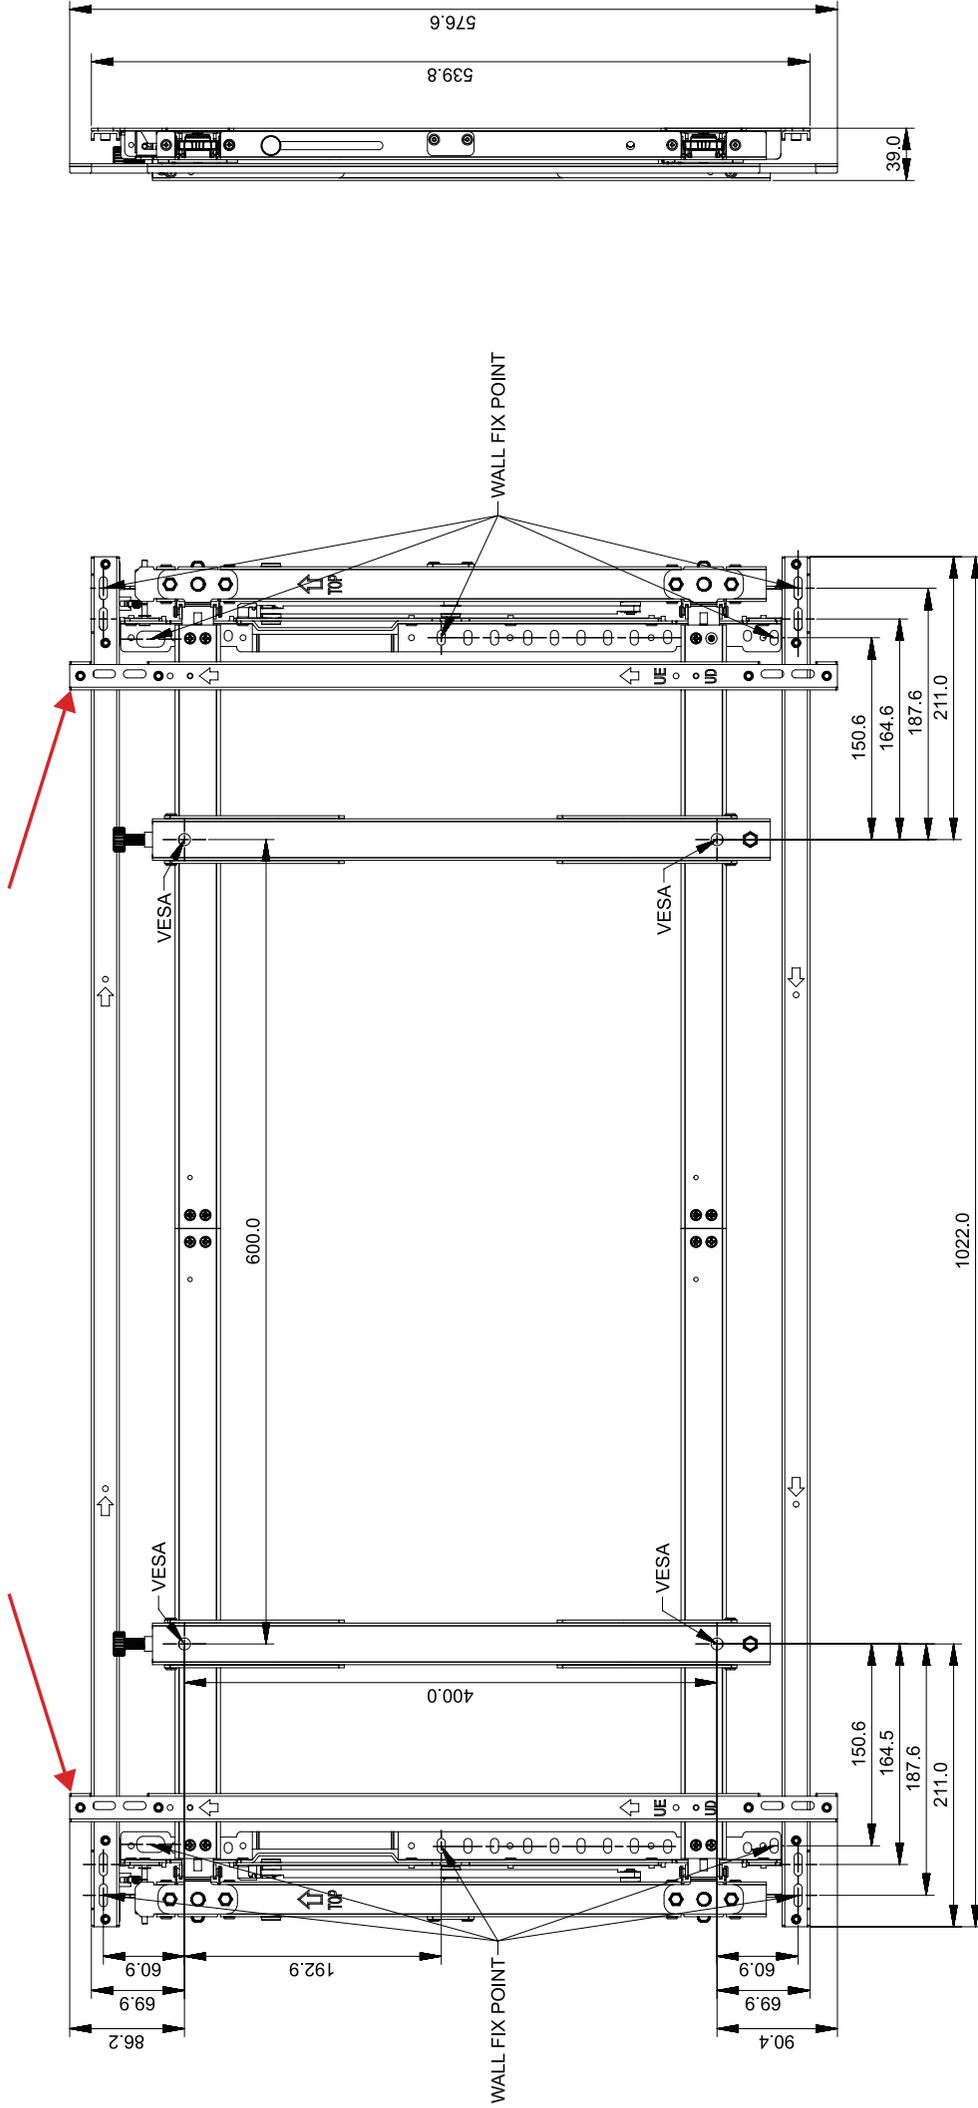

WMN-46VD (Portrait type – UD Series)

- ⚠ Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).
- ⚠ The VESA standards indicate that the wall mount should not be bilaterally symmetric when it is installed in portrait orientation.

Make sure to remove the component **A** before mounting the Signage.

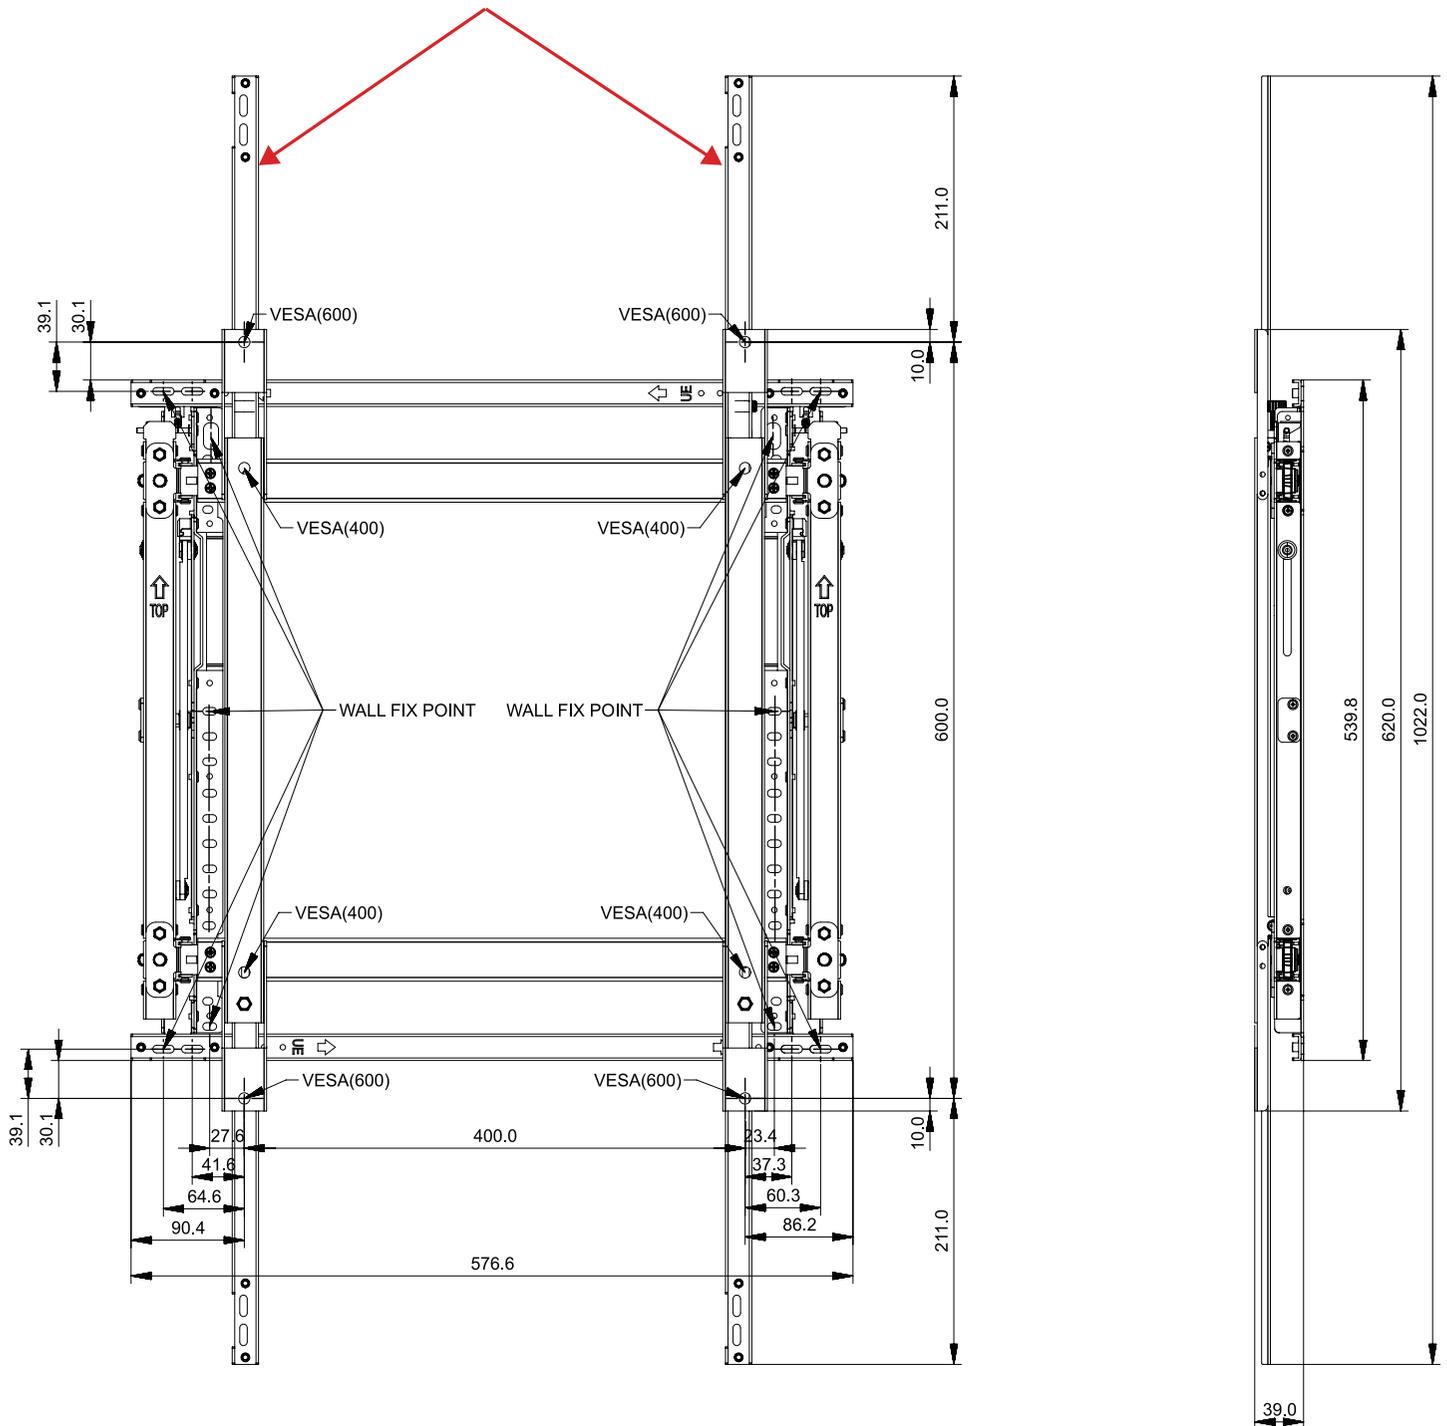

■ WMN-46VD (Portrait type – UE Series)

- ⚠ Make sure to take into account the additional distance required to adjust tolerance (+α mm / maximum 8.0mm) when you conform to specifications for distance (39.0mm).
- ⚠ The spacers are subject to tolerance of less than 1mm, depending on how they are attached.
- ⚠ The VESA standards indicate that the wall mount should not be bilaterally symmetric when it is installed in portrait orientation.

Make sure to remove the component **A** before mounting the Signage.

