



DRAMATICALLY IMPROVE CONFERENCING

BENEFITS

- Provide users all the flexibility they need to join any cloud video call with numerous connectivity options.
- Everyone is represented equally on the call with pinpoint-accurate AI-enhanced automatic framing and smart audio filtering technologies from Poly.
- Make collaboration better with Poly Lens remote device management software. Give IT better visibility and the power to make impactful changes.

POLY STUDIO X52 - ALL-IN-ONE VIDEO BAR FOR MEDIUM SIZED ROOMS

Specifically engineered to improve the video conferencing experience within a hybrid meeting environment, the Poly Studio X52 all-in-one video bar simplifies and enhances meetings. Bring meeting equality to attendees both in and out of the room with innovative audio and video experiences.

- Zoom into the action and see the smallest details with 20MP 4K UltraHD 95-degree FOV camera.
- Poly DirectorAI smart camera technology creates an equitable experience for your hybrid meetings.
- Mid-sized rooms can be ready in minutes, with the simple setup and all-in-one design including camera, mics, speakers, and built-in cloud video apps.
- Surround in-room meeting participants with legendary sound and remove distractions with noise canceling technologies.

POLY STUDIO X52



SPECIFICATIONS

PRODUCT SPECIFICATIONS

Package includes:

- Poly Studio X52
- Power supply
- HDMI cable
- Ethernet cable
- Monitor clamp
- Privacy cover

VIDEO STANDARDS AND PROTOCOLS

- H.264 AVC, H.264 High Profile, H.265, H.239

VIDEO INPUT

- 1x HDMI

VIDEO OUT

- 2x HDMI
- Touch display compatible

PEOPLE VIDEO RESOLUTION

- 4K, 30 fps (TX and RX) from 2048 Kbps
- 1080p, 60 fps from 1740 Kbps
- 1080p, 30 fps from 1024 Kbps
- 720p, 60 fps from 832 Kbps
- 720p, 30 fps from 512 Kbps

CONTENT VIDEO RESOLUTION

- Input
 - UHD (3840 x 2160)
 - HD (1920 x 1080p)
 - WSXGA+ (1680 x 1050)
 - UXGA (1600 x 1200)
 - SXGA (1280 x 1024)
 - WXGA (1280 x 768)
 - HD (1280 x 720p)
 - XGA (1024 x 768)
 - SVGA (800 x 600)

- Output
 - UHD (3840 x 2160)
 - WUXGA (1920 x 1200)
 - HD (1920 x 1080)
 - WSXGA+ (1680 x 1050)
 - SXGA+ (1400 x 1050)
 - SXGA (1280 x 1024)
 - HD (1280 x 720)
 - XGA (1024 x 768)
- Content frame rate
 - 5–60 fps (up to 4K resolution at 15 fps in call)

CONTENT SHARING

- Apple Airplay
- Miracast
- HDMI input
- Whiteboarding

CAMERA

- 110° DFOV, 95° HFOV
- 5x digital zoom
- UHD 2160p (4K) capture resolution
- Automatic meeting experience powered by Poly DirectorAI including group framing, people framing and speaker framing
- Secondary cameras can be added via USB and HDMI

AUDIO INPUT

- 1x HDMI
- Input for optional expansion microphone

MICROPHONES

- 2x MEMS microphones, plus 2x 2nd order microphones
- Up to 20 ft of microphone pick up range
- Optional expansion microphone available
- Poly noise filtering technologies

AUDIO OUTPUT

- Stereo speakers
 - Power Handling (RMS) 20 Watts
 - Power Handling (MAX) 40 Watts
 - Sensitivity 79 dB at 1-Watt 1 meter


OTHER INTERFACES

- 2x USB-A (3.0)
- 1x USB-C
- Bluetooth® 5.0*
- WiFi 6.0 802.11a/b/g/n/ac/ax Multi-channel Concurrency*

AUDIO STANDARDS AND PROTOCOLS

- 22 kHz bandwidth with Polycom Siren 22 technology
- 20 kHz bandwidth with G.719 (M- Mode) and Polycom Siren 22 technology
- 14 kHz bandwidth with Polycom Siren 14 technology, G.722.1 Annex C
- 7 kHz bandwidth with G.722, G.722.1
- 3.4 kHz bandwidth with G.711, G.728, G.729A

POLY STUDIO X52

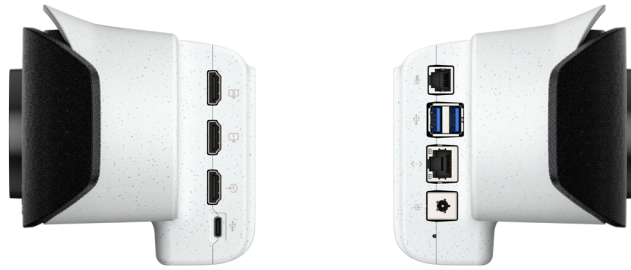

NETWORK

- IPv4
- IPv6
- 1x 10/100/1G Ethernet
- Auto-MDIX
- H.323 and/or SIP up to 6 Mbps running Poly Video App
- Polycom Lost Packet Recovery (LPR) technology
- Dynamic bandwidth allocation
- Reconfigurable MTU size
- Web proxy support – Basic, Digest, and NTLM

SECURITY

- Media encryption (H.323, SIP): AES-128, AES-256
- H.235.6 support
- Authenticated access to admin menus, web interface, and API
- Binary Floor Control Protocol (BFCP)
- Local account password policy configuration
- Security profiles
- Local account and login port lockout
- Secure defaults
- Remote logging with support for TLS
- Active directory external authentication

OPTIONS

- VESA mount kit
- Wall mount
- Table stand
- Poly TC8
- Poly TC10
- Poly Bluetooth remote control
- Poly Trio
- Poly Studio Table Microphone
- Metal faceplate
- TAA, JITC and no radio versions available

INTEROPERABILITY

- Support for native 3rd party applications including Zoom, Microsoft Teams and Google Meet
- Connect through H.323 and SIP protocols using Poly Video App Mode
- USB device mode

DIGITAL SIGNAGE

- Raydiant
- Appspace

ELECTRICAL

- Auto sensing power supply
- Typical operating voltage/power
 - 37 VA @ 120 V @ 60 Hz
 - 37 VA @ 230 V @ 50/60 Hz
 - Operating Heavily Loaded: 25W
 - Idle/Sleep: 8W
- Typical BTU/h: 65

ENVIRONMENTAL SPECIFICATION

- Operating temperature: 0 to 40 °C / 32 to 104 °F
- Operating humidity (non-condensing): 15 to 80%
- Non-operating temperature: -40 to 70 °C / -40 to 158 °F
- Non-operating humidity (non-condensing): 5 to 95%
- Maximum altitude: 16,000 ft / 4,876.8 m

PHYSICAL CHARACTERISTICS

- 30.3 W x 4.5 H x 4 D (Inches)
769.5 W x 115.2 H x 103 D (MM)
- 5.6 lbs/2.54 kg

MANAGEABILITY

- Cloud: Poly Lens service

WARRANTY

- One-year return to factory parts and labor

*Not available on no radio versions

Product details and specifications are subject to change. Some features may only be available with certain native apps or in Poly video mode.

LEARN MORE

For more information on Poly Studio X52, visit www.polycom/studio-x52



Poly Studio Base Kit G9 Plus for Microsoft Teams HP Mini IP PC w/TC10 (A3LU8AA)

Power	Power over Ethernet (PoE), compatible with IEEE 802.3at class 0
Power	150 W external power adapter, up to 89% efficiency
Expansion slots	1 M.2 2230; 2 M.2 2280
Ports	1 RJ-45
Internal Storage	256 GB PCIe® NVMe™ M.2 SSD
Graphics (integrated)	Intel® UHD Graphics 770
Memory Slots	2 SODIMM
Software included	Microsoft Teams Rooms
Operating temperature range	10 to 35°C
Non-Operating Humidity Range	5 to 95%
Operating humidity range	10 to 90% RH
Minimum dimensions (W x D x H)	177 x 175 x 34 mm (HP Mini IP Conference PC); 260 x 184 x 64 mm (Poly TC10 Touch Controller)
Package dimensions (W x D x H)	510 x 275 x 280 mm
Pallet dimensions (W x D x H)	120 x 100 x 213 cm
Cartons per layer	8
Weight	1.42 kg (HP Mini IP Conference PC); 1.27 kg (Poly TC10 Touch Controller)
Package weight	6800 g
Pallet weight	381 kg
What's in the box	Ethernet cable; Setup sheet; Warranty card; AC power adapter; Power cable; Poly TC10 touch controller; HP Mini IP Conference PC with Microsoft Team Rooms; HP DisplayPort to HDMI True 4K Adapter; HP Deskop Mini Port Cover v3; HP Desktop Mini v4+ VESA Sleeve with Power Supply Holder
Manufacturer Warranty	Poly standard one-year limited warranty



POLY STUDIO EXPANSION MICROPHONE

Tabletop expansion microphone for the Poly Studio X70, Poly Studio X50, and Poly Studio USB.

- Expand audio coverage in large rooms with a high-quality tabletop microphone.
- Designed with three (3) directional microphones for 360-degree audio coverage.
- Built to automatically level voices and suppress distractions, so that everyone is always heard clearly.
- Convenient mute button lets those at the far end of the table control the audio.

SPECIFICATIONS

MICROPHONES

- Three (3) unidirectional cardioid pattern microphones

FREQUENCY RESPONSE

- 80 Hz to 20 kHz

SENSITIVITY

- -40 dB (V/Pa)

SIGNAL TO NOISE RATIO (SNR)

- >70 dB

MAXIMUM SPL

- >90 dB

PICK UP RANGE

- Maximum of up to 2.5 m / 8.2 ft

I/O

- 7.6 m/25 ft audio RJ11 cable

DIMENSIONS

- 5.6 x 1.05 x 4.9 in / 143.05 x 26.59 x 124.13 mm (WxHxL)

WEIGHT

- 0.20 lb / 0.08 kg

CONTROLS

- Mute button with color-coded LED indicator

COMPATIBILITY

- Poly Studio X70, Poly Studio X50 and Poly Studio USB

PACKAGE CONTENT

- Poly Studio Expansion Microphone
- 25 ft / 7.6 m audio RJ11 cable
- Installation guide

OPTIONAL ACCESSORIES

- Cable Extender Kit for the Poly Studio Table Microphone
- Part number: 2215-88019-001

COLOR

- Black

WARRANTY

- One (1) year

PART NUMBER

- 2200-69631-001

LEARN MORE

For more information visit poly.com