

ClickShare Bar Pro

Barra video premium per conferenze wireless coinvolgenti e semplici



- **Audio stereo cristallino e di alta qualità***
- **Fotocamera 4K avanzata basata sull'intelligenza artificiale**
- **Roomdock cablato per la condivisione di contenuti 4K e connettività alternativa**
- **Interattività avanzata: touchback, annotazione e lavagna**
- **Prodotto a zero emissioni di carbonio****

ClickShare Bar Pro è una barra video all-in-one premium, a zero emissioni di carbonio, che consente conferenze wireless coinvolgenti e semplici in sale riunioni di medie dimensioni con qualsiasi piattaforma di videoconferenza. Grazie alle sue funzionalità AV avanzate (doppio schermo*, condivisione di contenuti 4K) e funzionalità interattive (touchback, annotazioni, lavagna), consente audio cristallino, visualizzazioni nitide e interattività migliorata per riunioni in cui tutti i partecipanti si sentono ascoltati e visti. Questa soluzione offre una flessibilità senza precedenti, consentendo ai responsabili IT di attrezzare facilmente le proprie sale riunioni. Insieme a una garanzia di 5 anni, la barra riduce complessivamente il costo totale di proprietà consolidando tutte le funzionalità di collaborazione, audio e video in un unico potente dispositivo.

*Gli altoparlanti stereo e il doppio schermo saranno disponibili a metà del 2024. **Etichetta a zero emissioni di carbonio prevista per la fine del primo trimestre del 2024.

Specifiche tecniche

CLICKSHARE BAR PRO

Specifiche generali	
Sistema operativo	Windows 10 e versioni successive macOS 11 (Ventura) e versioni successive Android v13 e versioni successive (app ClickShare) iOS 16 e versioni successive (app ClickShare)
Requisiti di sistema	Per un'esperienza fluida con Microsoft Teams o Zoom Minimo: Processore Intel i3 dual-core/8 GB di RAM/OS: Windows 10 ultima build o Mac OS Ventura ultima build Consigliato: Intel i5 processore a 4 core/8 GB di RAM/OS: Windows 10 ultima build o Mac OS ultima build
Uscite video	4K UHD (3840*2160) @ 30Hz. or 2x 1080p @ 30Hz. HDMI™ 1.4b or 1.4b or USB-C DP ALT mode (DisplayPort 1.2) (Dual screen available mid 2024)
Ingressi video	4k UHD (3840*2160) a 30Hz. Modalità USB-C DP ALT (DisplayPort 1.2)
Camera	4K, 1080p, 720p a 30 fps, zoom 5x/ePTZ, FOV 120°
Camera AI	Modalità di inquadratura di gruppo, inquadratura dei relatori e tracciamento e composizione fino a 4 persone
Uscita audio	2 altoparlanti full duplex e stereo da 10 W, impedenza 8 Ohm
Audio pickup	6 microfoni MEMS beamforming con cancellazione dell'eco e del rumore di fondo AI. Portata di rilevamento fino a 15 piedi/4,5 metri
ClickShare Button	2
ClickShare App	Desktop e dispositivi mobili
Native protocols	AirPlay, Google Cast, Miracast
Livello di rumore	Senza ventola
Protocollo di autenticazione	WPA2-PSK in modalità autonoma WPA2-PSK o IEEE 802.1X utilizzando il ClickShare Button in modalità di integrazione di rete
Protocollo di trasmissione wireless	IEEE 802.11 a/g/n/ac e IEEE 802.15.1
Portata	Massimo 30 m (100 piedi) tra ClickShare Button e ClickShare Bar
Banda di frequenza	2,4 GHz e 5 GHz (canali DFS supportati in un numero selezionato di paesi in modalità integrazione di rete)
Connessioni	1x USB-C 3.1 (DP) su schermo, 1x ingresso video USB-C 3.1 (DP), 1x USB-A 2.0, 1x Ethernet LAN 1Gbit, 1x USB-C 2.0 (laterale)
Intervallo di temperature	Funzionamento: da 0 °C a +40 °C (da +32 °F a +104 °F) Max: 35 °C (95 °F) a 3000 m Stoccaggio: da -20 °C a +60 °C (da -4 °F a +140 °F)
Umidità	Stoccaggio: da 0 a 90% di umidità relativa, senza condensa Funzionamento: da 0 a 85% di umidità relativa, senza condensa
Sistema antifurto	Blocco Kensington (posteriore e inferiore)
Certificazioni	FCC/CE
Touch screen support & Interactivity	Sì
Conferenze wireless	tramite app o Button
Vista locale	Sì
Connessione in rete	LAN e Wi-Fi
Management and reporting	Sì
Garanzia	1 anno standard. 5 anni di copertura tramite SmartCare
Dimensioni dell'unità di base ClickShare	
Dimensions (HxWxD)	98 mm x 640 mm x 101 mm
Power consumption	Operational: 5-20W, 65W Max
Power supply	Standard 110/220 V AC plug or USB-C (back)
Weight	2500 gr

Generato il: 30 May 2024

© 2024 Barco nv. Tutti i diritti riservati. La riproduzione totale o parziale è proibita in assenza di autorizzazione scritta. Tutti i nomi di marchi e di prodotti sono marchi, marchi registrati o nomi commerciali dei rispettivi proprietari. A causa delle continue innovazioni, le informazioni e le specifiche tecniche sono soggette a modifiche senza preavviso. Controlla www.barco.com per le specifiche più recenti.



CY-TF65BBC (Tray for WM55B/WM65B only)			
Mechanical Spec	Dimension (mm)	Set	269.8 x 111.3 x 56.9
		Package	294 x 136 x 69
	Weight (kg)	Set	0.5
		Package	0.7
	Color		Gray White
Connectivity	Extra Connectivity Ports		USB 1
			USB External (In/Out) 1
			Touch Out 1
			HDMI 1
			USB-C 1
Accessories	Included		Installation Guide Screws

STN-WM55R (Stand for WM55B only)			
Mechanical Spec	Dimension (mm)	Set	835 x 1632.9 x 850.6
		Package	1650 x 860 x 208
	Weight (kg)	Set	34.5
		Package	41.5
	Color		Light Gray
	VESA Mount		400 X 400
Accessories	Rotation		N/A
	Included		Installation Guide
	Slim Design No Assembly Required Installation		

Samsung Flip Pro

WMB Series

Unlimited learning possibilities.

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

For more information about Samsung Smart Signage WMB Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2022 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea



Take every learning experience to the next level

What is Flip Pro?

Introducing Samsung Flip Pro, the premium interactive display that takes learning experiences to the next level. With intuitive writing, comprehensive connectivity, smart solutions and brilliant hardware, Flip Pro provides both educators and students with boundless resources and great flexibility to create engaging learning. Experience unlimited learning possibilities with Samsung Flip Pro.

Technology highlights





Touch & Writing

- Fast & multi-touch
- Intuitive writing & drawing



Connectivity

- 3-in-1 USB-C port
- AirPlay 2
- SmartView+
- OPS mount*



Solution

- Workspace
- Boxlight MimioConnect
- Video call application
- Remote content push



Hardware

- 4Ch. 40W speaker*
- Ambient light sensor*
- Front panel*
- Rear handle*
- Antimicrobial Coating
- Shatterproof film



* Each feature may vary by model.

Touch & Writing

Latency


26ms

Sensing Level

2,048

Multi-touch

20

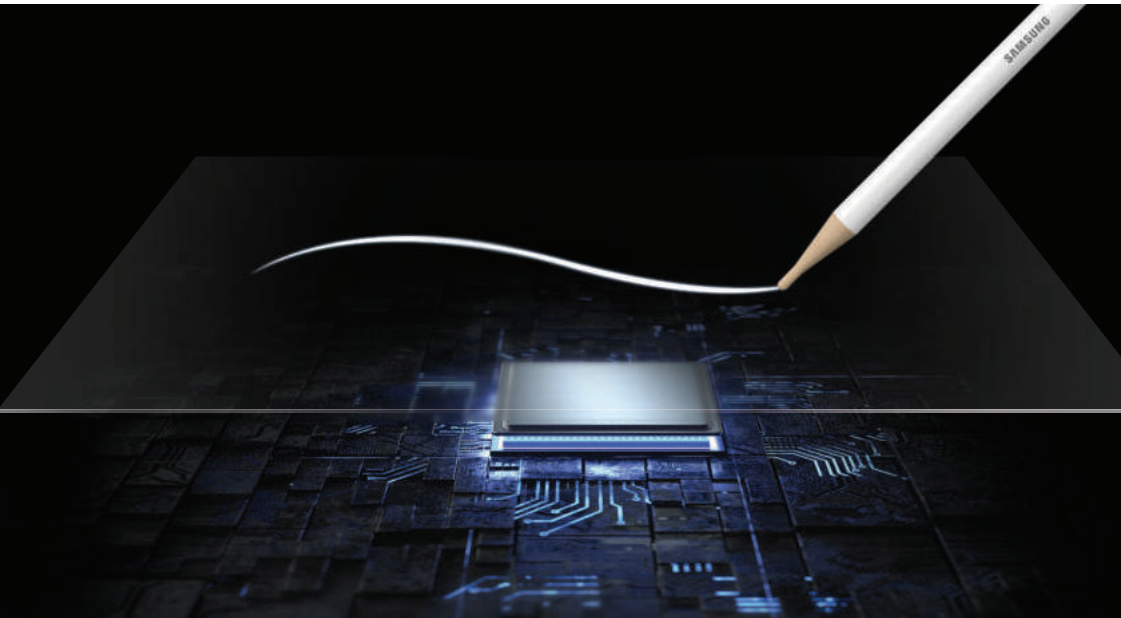

Fast & multi-touch Better interaction with best-in-class multi-touch

Samsung Flip Pro creates a realistic, smooth writing and drawing experience with touch technology with 26ms* latency and 2,048 points of thickness built directly into the display. Industry-best touch latency was achieved by Samsung's proprietary prediction logic which analyzes user's writing patterns. Plus, Flip Pro enables multi-touch for up to 20 people for enhanced interactivity.

* When using single touch.







Pen & brush mode



Flexible erasing



Quick tool & palette menu




Easy note layer

Intuitive writing & drawing Bring ideas to life in an instant

Ideas are brought to life instantly on Flip Pro with an intuitive user interface. Samsung Flip's unique pen and brush mode provides a real-world writing experience with various options, while flexible erasing requires just a swipe of your finger or palm. The quick tool and palette menu ensure creativity flows and toggle button easily enables a new note layer UI.


* All images are simulated for illustrative purposes.

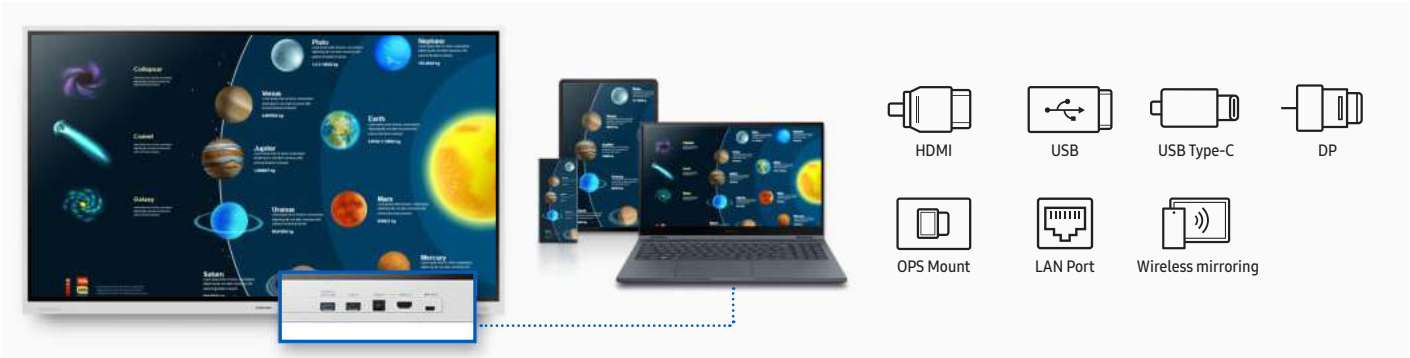

Versatile connectivity
Stay connected from any source

Flip Pro provides multiple connectivity options, including USB, HDMI, DP and OPS mount*. Educators can easily connect any device to access content and display information on a larger screen, as well as connect to any network and other devices through LAN port and wireless screen-mirroring.


* OPS mount is currently only available on WM75B and WM85B.

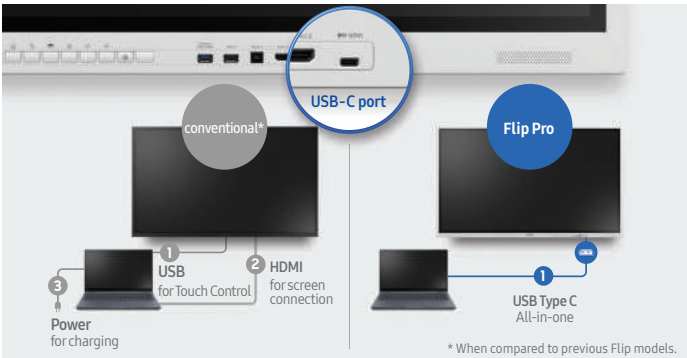

3-in-1 USB-C port
One single port for three functions

Connectivity is enhanced with three-in-one USB Type-C connectivity, enabling screen mirroring, touch control and external device charging (max. 65W)*, allowing educators to deliver interactive and engaging lessons without any hassle.

* Power delivery varies by model.

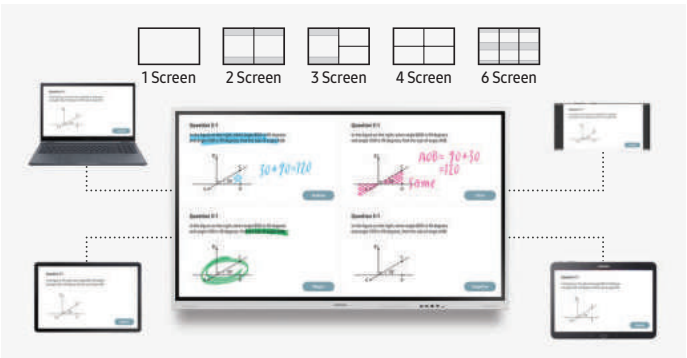

SmartView+
Smart, wireless sharing from multiple devices

With SmartView+, up to 50 devices can be simultaneously connected to the interactive display wirelessly, in addition to enabling multi-view on up to four screens, ideal for larger meeting rooms as well as digitized classrooms.



AirPlay 2
Share with AirPlay 2


Flip Pro is integrated with AirPlay 2, allowing educators and students to present on the big screen, increasing visibility and engagement in larger spaces, while ensuring no student misses out on important information.



OPS Mount
Use your favorite third-party education solutions

With OPS(Open Pluggable Specification) mount*, Flip Pro enables educators to use their third-party education solutions, allowing them to deploy school information systems(SIS), learning apps and tools.


* Sold separately.
** OPS mount is currently only available on WM75B and WM85B.

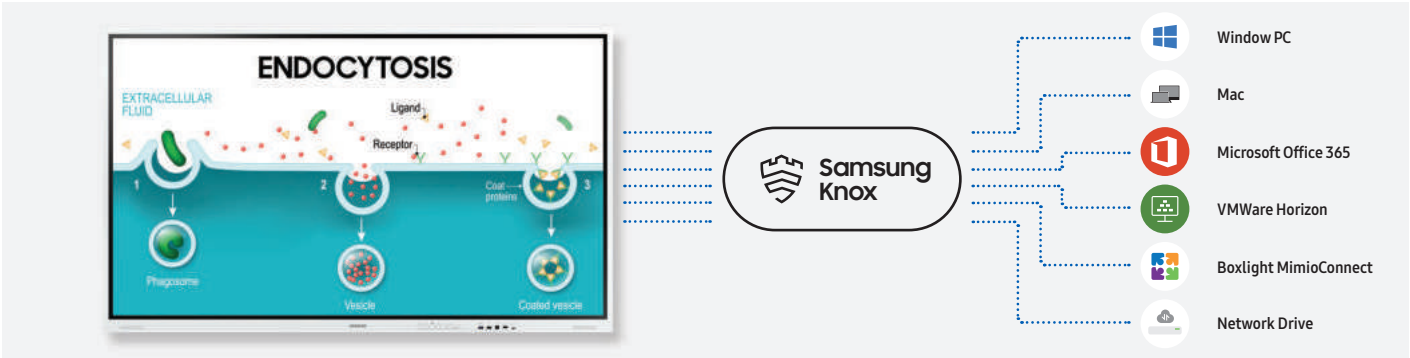

Workspace
Access whatever you need, from anywhere

With Workspace secured by Knox, Flip Pro enables users to easily access remote PC, network drive and other third-party applications such as Office 365, VMWare, Boxlight MimioConnect and video call applications*. This ensures efficiency from any location and an uninterrupted workflow for educators and students.

* Available apps may vary by region and require service subscription.

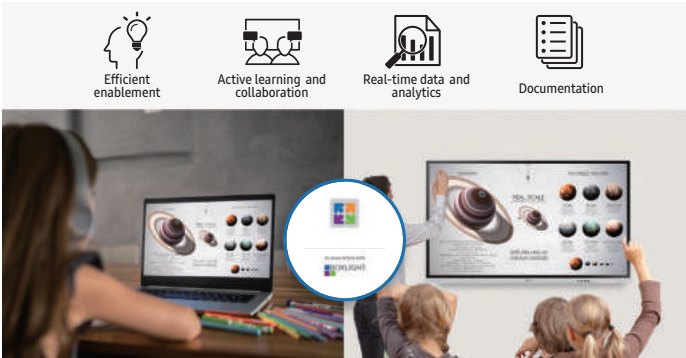

Boxlight MimioConnect
Optimize lesson planning with embedded learning solution

Flip Pro offers the MimioConnect* app, an online blended learning platform, providing an extensive catalog of versatile learning content.


* Service availability varies by region and requires Boxlight subscription.



Video call application
Collaborate with ease over video conferencing

Video conferencing* is supported on Flip Pro based on the WebRTC(Real Time Communication) API, supporting apps such as Google Duo without the need for additional solution compatibility.


* Video call application will be available through a firmware update available Q2 2022. Webcam must be purchased separately.
** Supported webcam(9models): Logitech C930e, C922, C922x, C925E, C920s, C920, C920-CC930C, Logitech Stream Cam.

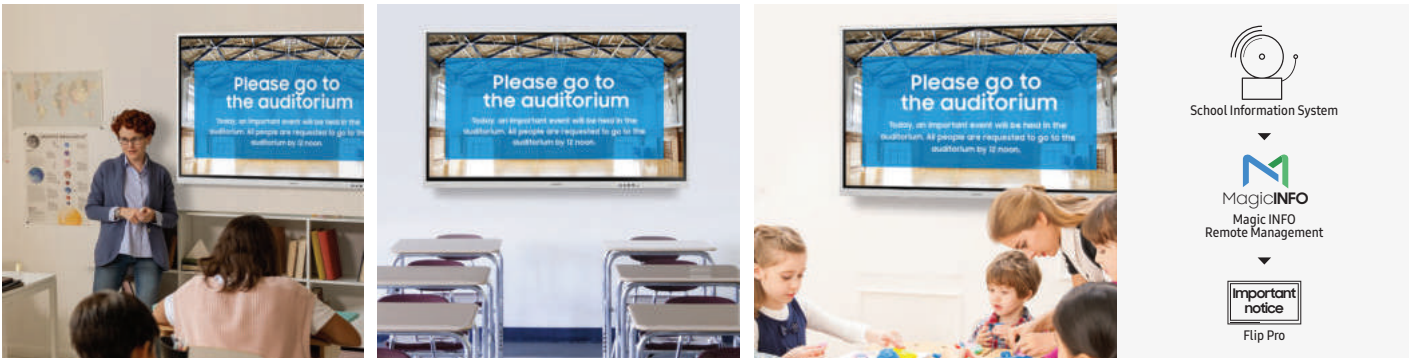

Remote content push
Keep informed with remote management solution

Using Samsung's MagicINFO Remote Management solution*, Flip Pro offers new functionality that pushes content, alerts and warnings from the school information system to the display, notifying teachers and students of important updates which can be pushed directly to Flip Pro displays in every classroom.


* Requires MagicINFO license to use this service and SIS(School Information Service) should be separately built and integrated with MagicINFO.

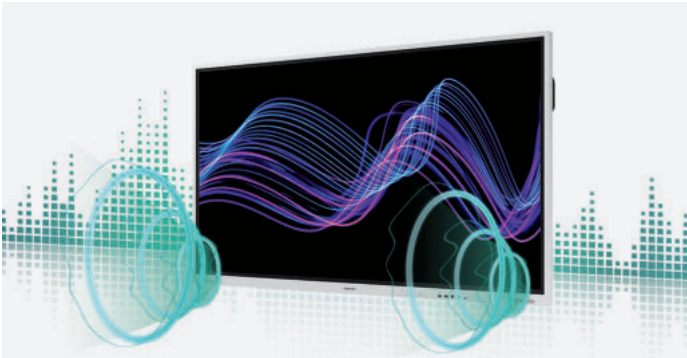

4.0Ch. 40W speaker
Engage learners with immersive sound

Flip Pro offers powerful 4-channel 40-watt speakers* front and backside to enhance students’ listening experience, so they are more immersed in content when both watching and listening.

* Speaker option varies by model.

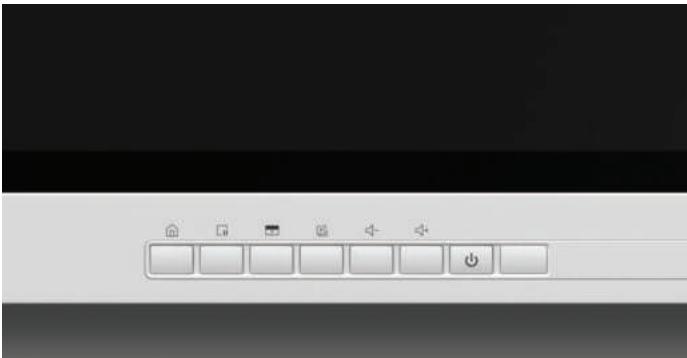

Front panel
Access frequently used menu directly

Use functions and hotkeys faster and easier. Flip Pro puts the buttons that users most frequently use on the front panel* so they can access more easily and intuitively.


* Built-in front panel is currently only available on WM75B and WM85B.



Ambient light sensor
Enjoy optimal content in any lighting conditions

The screen of Flip Pro is equipped with an ambient light sensor* to adjust the brightness according to lighting conditions. Whether the classroom is bright or dark, content can be enjoyed to the fullest.

* Ambient light sensor is currently only available on WM75B and WM85B.

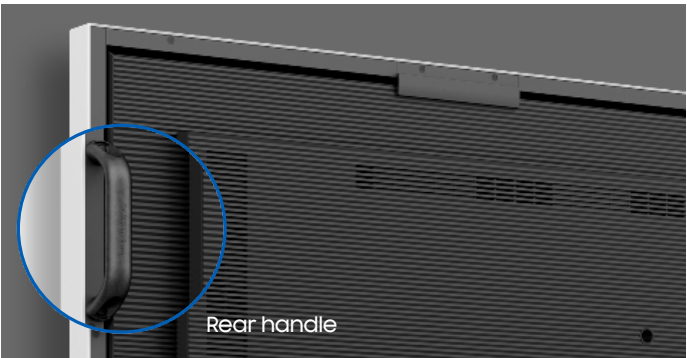

Rear handle
Easy moving. Less effort.

Move the Flip Pro display freely anywhere in the classroom. The rear handle helps teachers move the large display easily with little effort*.

* Requires separate standing mount to move which must be purchased separately.
* Rear handle is currently only available on WM75B and WM85B.



Protective screen technology
Clean screen and minimized damage risk

Samsung Flip Pro delivers peace of mind with a built-in Antimicrobial Coating* which inhibits microbial growth. Plus, the Flip's display is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

* To perform its antibacterial function, this product has been treated with the biocidal substance Silver phosphate glass.
* Antibacterial property does not protect users against bacteria and provides no protection against viruses including Covid-19.
* Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.
* Antibacterial certification: UL2282 which is granted when the antibacterial effectiveness is more than 99%.
(Test method(JIS Z 2801): after inoculation of 0.4cc of liquid with bacteria(Escherichia coli and Staphylococcus aureus) on specimen(5cm x 5cm), a sterilized film(4cm x 4cm) is adhered and left in a thermo-hygrostat with a relative humidity of 90% or more at 35°C for 24 hours, and then the efficiency of killing of the bacteria is measured / Test agency: KOTITI Testing & Research Institute)
* For further details regarding regional restrictions on the antibacterial function, please refer to each country's Samsung.com website.

Versatility for various purposes, in any space

Samsung Flip Pro is available in a variety of sizes to suit any space in both corporate environments and education especially. Regardless of the size of a space, number of people or use case, Flip Pro is an optimal solution for users looking to enhance efficiency and creativity.

Corporate



Huddle room - WM55B



Mid-sized meeting room - WM65B



Boardroom - WM75B / WM85B

Education



Small classroom- WM55B



Mid-sized classroom - WM65B



Auditorium - WM75B / WM85B

Specifications

Model			WM55B	WM65B
Panel	Diagonal Size		55"	65"
	Type		New Edge, 60Hz	New Edge, 60Hz
	Resolution		3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)
	Brightness(Typ.)		350cd/m2 (without glass)	350cd/m2 (without glass)
	Contrast Ratio(Typ.)		4000:1 (Typ.)(without glass)	4000:1 (Typ.)(without glass)
	Viewing Angle(H/V)		178:178	178:178
	Response Time(G-to-G)		8ms(Typ.)	8ms(Typ.)
Sound	Operation Hour		16/7	16/7
	Speaker Type		Built in Speaker (10W x 2CH)	Built in Speaker (10W x2CH)
Connectivity	INPUT	RGB	N/A	N/A
		VIDEO	(Basic) HDMI 1, DP1, (With Tray) HDMI 1, USB-C	(Basic) HDMI 1, DP1, (With Tray) HDMI 1, USB-C
		AUDIO	N/A	N/A
		USB	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1
	OUTPUT	RGB	N/A	N/A
		VIDEO	N/A	N/A
		AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)
		Touch Out	(Basic) Touch Out 1 (USB Upstream Type), (With Tray) Touch Out 1	(Basic) Touch Out 1 (USB Upstream Type), (With Tray) Touch Out 1
	INTERNAL	SENSOR	N/A	N/A
	EXTERNAL	CONTROL	Touch Input RS232C thru stereo jack, RJ45(For MDC)	Touch Input RS232C thru stereo jack, RJ45(For MDC)
Touch	BT/WiFi		Yes (Keyboard/Mouse,speaker)	Yes (Keyboard/Mouse,speaker)
	Type		IR	IR
	# of Drawing		20 touch (internal/external) * Whiteboarding app works 4 drawing	20 touch (internal/external) * Whiteboarding app works 4 drawing
	Touch Pen Type		Passive Pen with magnet	Passive Pen with magnet
	Object Recognition Range		2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)
	Touch Response Time		6.7ms	6.7ms
	Drawing Speed (Touch latency)		26ms	26ms
	Haze		8%~12%	8%~12%
	Thickness		2.85T	3.2T
	Hardness		Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass
	Additional Film		AG Flim(Anti glare)	AG Flim(Anti glare)
			Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating
Power	Type		Internal	Internal
	Power Supply		AC100-240V 50/60Hz	AC100-240V 50/60Hz
	Power Consumption	Max[W/h]	154W(100-240V)	528W(100-240V), 506W(220-240V), OPS(16V/4.5A)
		Typical[W/h]	95W	124W
		Rating[W/h]	140W	175W
		Stand-by[W/h]	0.5	0.5
		BTU[W/h]	525.14W	656.425W
	Dimension (mm)	Set	1297.4 x 768.2 x 59.9	1522.4 x 897.6 x 62.9
		Package	1464 x 915 x 190	1691 x 1055 x 198
	Weight (kg)	Set	28.6	39.7
Package		35.9	48.2	
Mechanical Spec	Color		Gray White	Gray White
	VESA Mount		400 * 400	400 * 400
	Protection Glass		Yes	Yes
	Stand Type		Stand / Wallmount (STN-WM55R / WMN4277SF)	Wallmount (WMN-WN65R)
	Media Player Option Type		N/A	N/A
	Rotation		Landscape only	Landscape only
	Power Cable Length		3M /2.4M(US)	3M /2.4M(US)
	Accessory		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black) Waranty/QSG
	Operating Temperature		0°C~ 40°C	0°C~ 40°C
	Humidity		10 ~ 80%, non-condensing	10 ~ 80%, non-condensing
Operation	Key		Flip App	Flip App
	Orientation		Landscape / Portrait	Landscape / Portrait
	H/W		Touch module(IR), Built in Speaker(20W 2CH), WiFi/BT Module Embedded	Touch module(IR), Built in Speaker(20W 2CH), WiFi/BT Module Embedded
Feature	S/W	First screen	Flip S/W (whiteboarding app)	Flip S/W (whiteboarding app)
		Apps	Document viewer	Document viewer
			SmartView+	SmartView+
			Video player	Video player
			Web browser	Web browser
			Workspace	Workspace
			(RDP/VNC, Office365, VMWare)	(RDP/VNC, Office365, VMWare)
			Edu tool	Edu tool
		mimioconnect(N.America Only)		mimioconnect(N.America Only)
		WebRTC	Yes	Yes
Upgradable web engine		Yes	Yes	
SmartView+		Yes	Yes	
Airplay	Ready to update ('22.5)	Ready to update ('22.5)		
Internal Player (Embedded H/W)	Platform	Pontus-M (Tizen 6.5)	Pontus-M (Tizen 6.5)	
	Processor	CA72 Quad(1.7GHz)	CA72 Quad(1.7GHz)	
	Storage	32GB (2.65GB Occupied by O/S, 29.35GB Available)	32GB (2.65GB Occupied by O/S, 29.35GB Available)	
	Operating System	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	
Security			802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	
Accessories	Included		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG	
	Optional	Stand	STN-WM55R	
		Mount	WMN-4277SF	
		OPS Mount	-	
Tray		CY-TF65BBC		
3rd party compatibility			Logitech RallyBar Plus	

Model			WM75B	WM85B	
Panel	Diagonal Size		75"	85"	
	Type		New Edge, 60Hz	New Edge, 60Hz	
	Resolution		3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)	
	Brightness(Typ.)		350cd/m2 (without glass)	350cd/m2 (without glass)	
	Contrast Ratio(Typ.)		4700:1 (Typ.)(without glass)	4700:1 (Typ.)(without glass)	
	Viewing Angle(H/V)		178-178	178-178	
	Response Time(G-to-G)		6ms(Typ.)	6ms(Typ.)	
Sound	Operation Hour		16/7	16/7	
	Speaker Type		Built in Speaker (10W x 4CH)	Built in Speaker (10W x 4CH)	
Connectivity	INPUT	RGB	N/A	N/A	
		VIDEO	HDMI 2(Rear1, Front 1), DP1, USB C(Front), OPS I/F	HDMI 2(Rear1, Front 1), DP1, USB C(Front), OPS I/F	
		AUDIO	N/A	N/A	
		USB	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	
	OUTPUT	RGB	N/A	N/A	
		VIDEO	N/A	N/A	
		AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)	
		Touch Out	Touch Out 2 (USB Upstream Type, Front 1, Rear1)	Touch Out 2 (USB Upstream Type, Front 1, Rear1)	
	INTERNAL	SENSOR	N/A	N/A	
	EXTERNAL	CONTROL	Touch Input RS232C thru stereo jack, RJ45(For MDC)	Touch Input RS232C thru stereo jack, RJ45(For MDC)	
Touch	BT/WiFi		Yes (Keyboard/Mouse, Speaker)	Yes (Keyboard/Mouse,speaker)	
	Type		IR	IR	
	# of Drawing		20 touch (internal/external) * Whiteboarding app works 4 drawing	20 touch (internal/external) * Whiteboarding app works 4 drawing	
	Touch Pen Type		Passive Pen with magnet	Passive Pen with magnet	
	Object Recognition Range		2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	
	Touch Response Time		6.7ms	6.7ms	
	Drawing Speed (Touch latency)		26ms	26ms	
	Haze		8%~12%	8%~12%	
	Thickness		3.2T	3.2T	
	Hardness		Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass	
	Additional Film		AG Flim(Anti glare)	AG Flim(Anti glare)	
			Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	
Power	Type		Internal (Main 1ea, OPS 1ea)	Internal (Main 1ea, OPS 1ea)	
	Power Supply		AC100-240V 50/60Hz	AC100-240V 50/60Hz	
	Power Consumption	Max[W/h]	473W(100-240V), 451W(220-240V), OPS(16V/4.5A)	528W(100-240V), 506W(220-240V), OPS(16V/4.5A)	
		Typical[W/h]	187W	197W	
		Rating[W/h]	430W(100-240V), 410W(220-240V), OPS(16V/4.5A)	480W(100-240V), 460W(220-240V), OPS(16V4.5A)	
		Stand-by[W/h]	0.5	0.5	
Mechanical Spec	Dimension (mm)	BTU[W/h]	1612.93W(100-240V), 1537.91W(220-240V), OPS(16V/4.5A)	TBD	
		Set	1724 x 1026.3 x 89	1945.8 x 1151.1 x 89	
	Weight (kg)	Package	1905 x 1189 x 287	2136 x 1318 x 260	
		Set	59.3	75.2	
	Mechanical Spec	Weight (kg)	Package	72.2	91.6
			Color	Gray White	Gray White
		VESA Mount	400 * 400	600 * 400	
		Protection Glass	Yes	Yes	
		Stand Type	Wall Mount	Wall Mount	
		Media Player Option Type	OPS Slot support	OPS Slot support	
		Rotation	Landscape only	Landscape only	
		Power Cable Length	3M /2.4M(US)	3M /2.4M(US)	
Accessory		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Waranty/QSG		
Operation		Operating Temperature	0°C~ 40°C	0°C~ 40°C	
Feature	Humidity		10 ~ 80%, non-condensing	10 ~ 80%, non-condensing	
	Key	Flip App		Flip App	
		Orientation		Landscape	Landscape
	S/W	H/W		Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded	Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded
		First screen	Flip S/W (whiteboarding app)		Flip S/W (whiteboarding app)
			Apps	Document viewer	
		SmartView+		SmartView+	
		Video player		Video player	
		Web browser		Web browser	
		Workspace		Workspace	
		(RDP/VNC, Office365, VMWare)		(RDP/VNC, Office365, VMWare)	
		Edu tool		Edu tool	
		mimioconnect(N.America Only)		mimioconnect(N.America Only)	
		Internal Player (Embedded H/W)	Yes		Yes
			Yes		Yes
			Yes		Yes
			Ready to update ('22.5)		Ready to update ('22.5)
			Pontus-M (Tizen 6.5)		Pontus-M (Tizen 6.5)
			Cortex A72 1.7GHz Quad-Core CPU 2MB L2		Cortex A72 1.7GHz Quad-Core CPU 2MB L2
32GB (2.65GB Occupied by O/S, 29.35GB Available)			32GB (2.65GB Occupied by O/S, 29.35GB Available)		
Tizen 6.5 : Samsung Proprietary OS(VDLinux)			Tizen 6.5 : Samsung Proprietary OS(VDLinux)		
Accessories	Security		802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	
	Included	Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG		Power Cord, USB Upstream Cable(1ea), Pen(2ea), Waranty/QSG	
		Optional	N/A (3rd party company stand can be supported through VESA)		N/A (3rd party company stand can be supported through VESA)
			Stand Mount	WMN8200SF	
3rd party compatibility			CY-PBRK200	CY-PBRK200	
3rd party compatibility			-	-	
3rd party compatibility			Logitech RallyBar Plus	Logitech RallyBar Plus	



SCHEMA TECNICA

LOGITECH TAP SCHEDULER

Trovare e richiedere l'ambiente perfetto per le riunioni sarà semplicissimo con Tap Scheduler. Questo pannello per pianificazione appositamente progettato si integra con le soluzioni di Microsoft Teams, Zoom Rooms, Robin e Meetio per indicare la disponibilità a distanza e fornire dettagli sulla riunione.

PANNELLO PER PIANIFICAZIONE PER SALE RIUNIONI

Ottieni il massimo da ogni spazio riunioni aiutando i dipendenti a trovare facilmente la sala giusta, che si tratti di controllare i dettagli della sala per assicurarsi che sia il posto giusto o di prenotarne una per meeting informali o programmati.


Con un ampio schermo e un profilo elegante e discreto, Tap Scheduler è progettato per una visualizzazione e un uso immediati. Completo di vetri, montanti e supporti a parete, Tap Scheduler può essere comodamente installato all'esterno di qualsiasi sala. La sua gestione dei cavi integrata nasconde i fili per un aspetto pulito e professionale. Affidati a Tap Scheduler per prestazioni affidabili con componenti resistenti, progettati per durare nel tempo.

SCEGLI LA PIATTAFORMA

Tap Scheduler può essere facilmente configurato come pannello di Microsoft Teams, come schermo per la pianificazione di Zoom Rooms e con le altre principali soluzioni per l'organizzazione delle stanze. Posiziona Tap Scheduler fuori da qualsiasi spazio di riunione per un'esperienza uniforme in tutta la tua distribuzione.




IL POSTO GIUSTO, AL MOMENTO GIUSTO

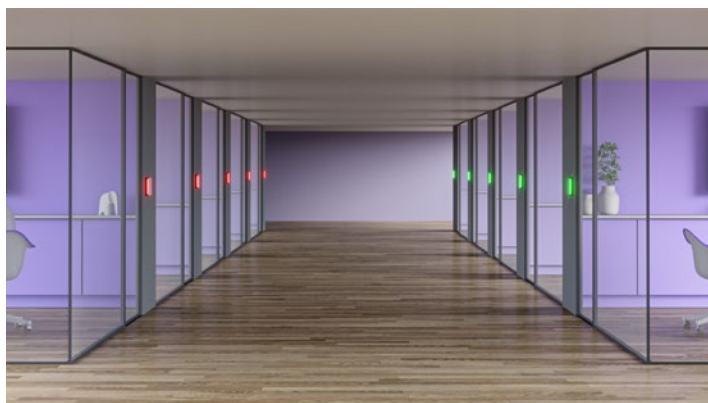

Disponibilità a distanza


Trova rapidamente una stanza aperta grazie alle luci LED verdi o rosse che indicano la disponibilità a distanza.

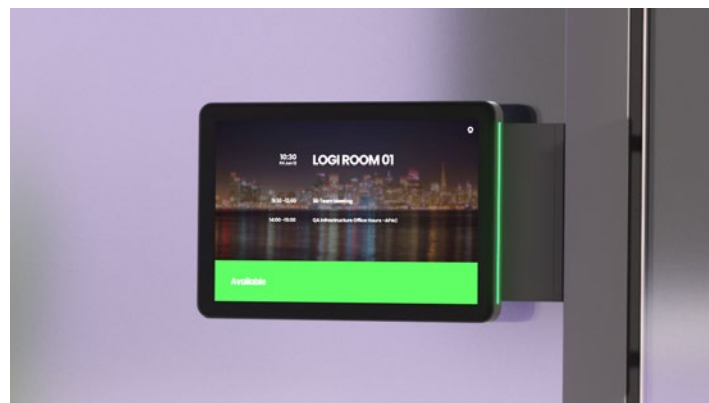

Dettagli da vicino


Visualizza i dettagli della riunione, chiedi le sale e prenota le riunioni da vicino su un ampio schermo da 10,1".

INSTALLAZIONE COMODA E PRATICA

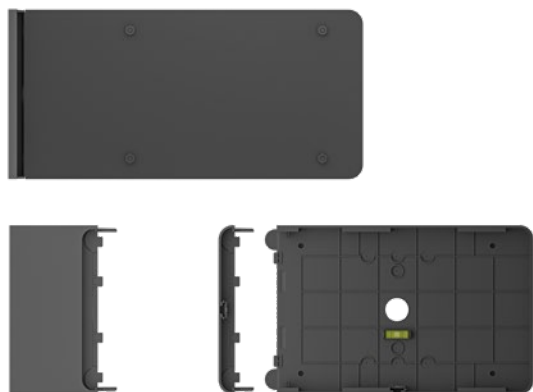

Semplice installazione grazie ai supporti inclusi

Posiziona Tap Scheduler fuori da qualsiasi sala grazie ai supporti inclusi per vetro, pareti e montanti per una rapida implementazione.

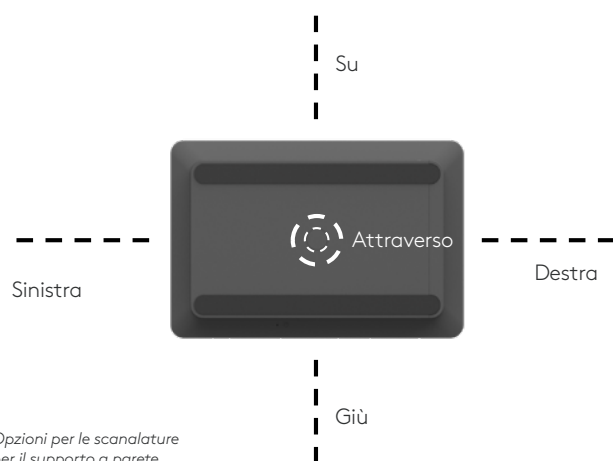

Nascondi i cavi per un'installazione ordinata



Le diverse opzioni per le scanalature nascondono i cavi permettendo un'installazione ordinata e professionale.



Espandi le opzioni di visualizzazione con il montaggio ad angolo

Accessorio opzionale ideale per il posizionamento ad altezze inferiori o la visualizzazione ad angolo, il supporto angolare per Tap Scheduler aggiunge un angolo di 14° alla staffa di montaggio del dispositivo, facilitando la lettura del programma delle riunioni della sala.

PANNELLO DI PIANIFICAZIONE PROGETTATO APPOSITAMENTE

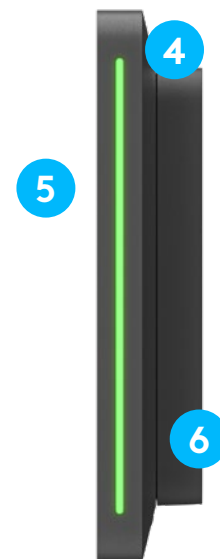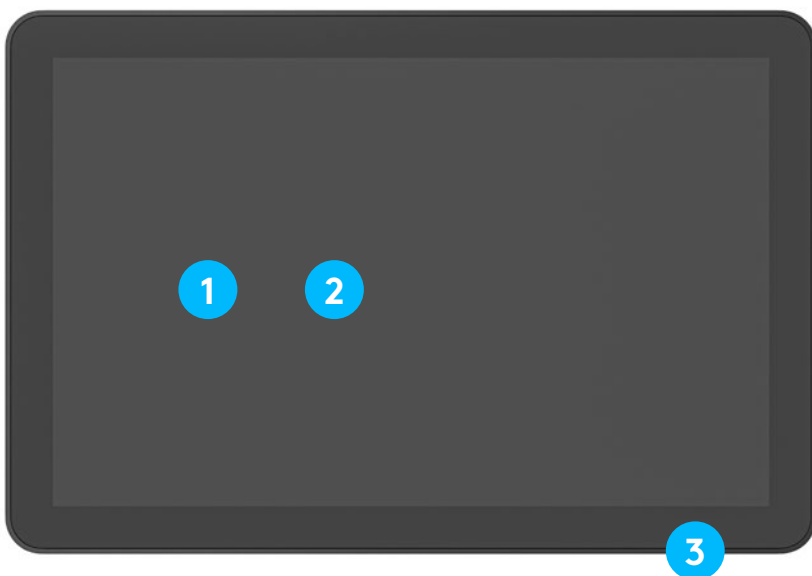

- 1 Touchscreen da 10,1"':** leggi facilmente i dettagli e prenota una sala sull'ampio touchscreen reattivo.
- 2 Anti-impronte:** rivestimento oleorepellente che resiste alle impronte e consente la leggibilità.
- 3 Struttura resistente:** i componenti sono progettati per durare nel tempo, con lo schermo sigillato per proteggerne le parti e resistere alla pulizia regolare.
- 4 Illuminazione per la disponibilità:** le spie di stato verdi o rosse indicano la disponibilità a distanza senza distrarre dall'ambiente circostante.
- 5 Angolo piatto per l'accessibilità:** Tap Scheduler si monta piatto contro la parete per permettere una facile lettura anche da altezze diverse.
- 6 Installazione del profilo ribassato:** senza bisogno di compensazione, Tap Scheduler si monta a filo del muro offrendo una presenza elegante e discreta.

SPECIFICHE DEL PRODOTTO		
Dimensioni (altezza x larghezza x profondità) Solo dispositivo 6,5 x 9,69 x 1,12 pollici 165 x 246,2 x 28,5 mm 0,7 kg (1,5 libbre) Supporto per superficie 6,5 x 9,69 x 1,24 pollici 165 x 246,2 x 31,4 mm Fissaggio su montante 6,5 x 11,52 x 1,75 pollici 165 x 292,6 x 44,5 mm	Touchscreen Dimensione: diagonale da 10,1" Tipologia di schermo: IPS (In-Plane Switching) Pannello LCD con retroilluminazione LED Risoluzione: 1280 x 800 Angolo di visualizzazione: 85° (su/giù/sinistra/destra) Multi-touch capacitivo 10 punti Luminosità: 400 nit Contrasto: 1000:1 Anti-impronte: rivestimento oleorepellente Angolazione della posizione: 0° (piatto sulla superficie di montaggio)	Specifiche generali Sensori: accelerometro, illuminazione ambientale Sequenza di montaggio: VESA FDMI 100 mm x 100 mm Uscite dei cavi: orizzontale/verticale/centrale
ALIMENTAZIONE E CAVI	PORTE E INTERFACCE	CONTENUTO DELLA CONFEZIONE
Power over Ethernet (PoE), IEEE 802.3af tipo 1, dispositivo di classe 3 *Necessita di rete abilitata PoE o iniettore PoE e cavo Ethernet (non inclusi)	Ethernet: 10/100 mbps Wi-Fi: 802.11a/b/g/n/ac Bluetooth 5.0 (inattivo, destinato per uso futuro)	Logitech Tap Scheduler Supporto multi-superficie (vetro/parete a secco) Accessorio per montaggio su angolo Fissaggio su montante Componenti per il montaggio Documentazione
GESTIONE DISPOSITIVI	COMPATIBILITÀ E CERTIFICAZIONI	AMBIENTE
Monitora e gestisci grazie alle piattaforme Logitech Sync per la gestione da remoto, Microsoft Teams Admin Center e Gestione dei dispositivi Zoom.	Logitech Tap Scheduler è certificato o compatibile con le principali soluzioni per l'organizzazione delle sale, come: Microsoft Teams Panel Schermo per la pianificazione Zoom Rooms Pannello di pianificazione di Meetio Pannello di pianificazione di Robin Schermo per sala riunioni Appspace Consulta www.logitech.com/support/tapscheduler-compatibility per ulteriori informazioni sulle più recenti certificazioni e compatibilità. Compatibile anche con la piattaforma Logitech Sync per la gestione da remoto.	Temperatura di esercizio: 0 - 40 °C Temperatura di immagazzinamento: -40 - 70 °C Umidità: 10% - 95%
SICUREZZA		
		Full Disk Encryption: AES-128 Crittografia dati: crittografia simmetrica, PKI Identità dispositivo: protetto da attestazione dispositivo Protezione chiave: Arm TrustZone, RPMP
GARANZIA		NUMERI DI SERIE
 Non preoccuparti del normale ciclo di deprezzamento e sostituzione della maggior parte delle apparecchiature per sale riunioni con l'acquisto di una estensione di garanzia, che aggiunge un anno alla garanzia di due anni del produttore Logitech originale. Contatta il tuo rivenditore per informazioni sulla disponibilità. Garanzia biennale standard sull'hardware inclusa		Logitech Tap Scheduler grafite 952-000091 Logitech Tap Scheduler bianco 952-000094



www.logitech.com/TapScheduler

Contatta il rivenditore
o contattaci su
www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Losanna

Logitech Asia Pacific Ltd.
Tel: 852-2821-5900
Fax: 852-2520-2230

© 2023 Logitech. Logitech, il logo Logitech e altri marchi Logitech sono di proprietà di Logitech e possono essere marchi registrati. Tutti gli altri marchi appartengono ai rispettivi proprietari. Logitech non si assume alcuna responsabilità per errori eventualmente contenuti nel presente documento. Le informazioni su prodotto, prezzo e funzionalità contenute nel presente documento sono soggette a modifiche senza preavviso.

Data di pubblicazione: febbraio 2023